


TRIPPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

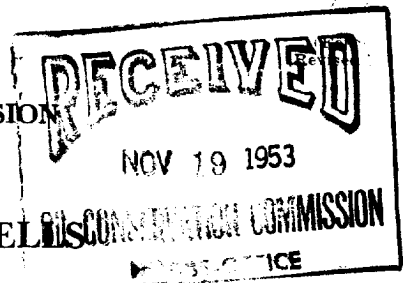

MISCELLANEOUS REPORTS ON WELLS

Submit this report in TRIPPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL	X	REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)	

November 12, 1953
(Date)

Midland, Texas
(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

HONOLULU OIL CORPORATION

Tillie Lewis

(Company or Operator)

(Lease)

Great Western Drilling Company

Well No. 1 in the SW 1/4 SE 1/4 of Sec. 14

(Contractor)

T. 13-S, R. 36-E, NMPM, Bronco-Devonian Pool, Lea County.

The Dates of this work were as follows: November 8, 1953

Notice of intention to do the work (was) (submitted) submitted on Form C-102 on October 13, 1953, (Cross out incorrect words)

and approval of the proposed plan (was) (obtained) obtained.

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

Well was plugged as follows: 0-25', 20 sack cement; 25'-280', mud (9.0 lbs. per gallon); 280'-330', 40 sack cement; 330'-4577', mud; 4577'-4637', 50 sack cement; 4637'-5234', mud; 5234'-5300', 25 sack cement; 5300'-9268', mud; 9268'-9400', 50 sack cement; 9400'-11,466', mud; 11,466'-11,600', 50 sack cement; 11,600'-12,143', mud; 12,143'-12,273' TD, 50 sack cement.

The 9-5/8" casing was cut at 1500' and pulled. Casing left in the hole is as follows: 13-3/8" at 346', cemented from shoe to surface with 375 sack; 9-5/8" from 1500' to 4652', cemented with 600 sack.

Witnessed by N. W. Stroup
(Name)

Honolulu Oil Corporation
(Company)

District Superintendent
(Title)

Approved: OIL CONSERVATION COMMISSION

[Signature]
(Name)

Oil & Gas Inspector

(Title)

(Date)

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name *George R. Hay*

Position Division Development Engineer

Representing HONOLULU OIL CORPORATION

Address P. O. Drawer 1991, Midland, Texas