

30-025-21817

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY


SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well gas ☐ well other ☐
2. NAME OF OPERATOR
Getty Oil Company - Levaco Prod. Inc.
3. ADDRESS OF OPERATOR
P. O. Drawer DD, Levelland, Texas 79336
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.) 1980' FNL&660' FEL, Sec. 35-13S-35E
AT SURFACE: 4197' G.L.
AT TOP PROD. INTERVAL: 9690-9864'
AT TOTAL DEPTH: 9880'
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:
TEST WATER SHUT-OFF ☐
FRACTURE TREAT ☐
SHOOT OR ACIDIZE ☐
REPAIR WELL ☐
PULL OR ALTER CASING ☐
MULTIPLE COMPLETE ☐
CHANGE ZONES ☐
ABANDON* ☐
(other) ☐

SUBSEQUENT REPORT OF:

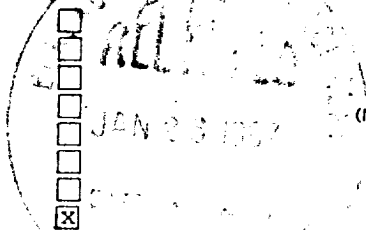

5. LEASE
NM -01124
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
-
7. UNIT AGREEMENT NAME
-
8. FARM OR LEASE NAME
Willard Beaty
9. WELL NO.
2
10. FIELD OR WILDCAT NAME
Lazy "J" Penn
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec 35-13S-33E
12. COUNTY OR PARISH Lea 13. STATE New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)
4208' K. B.

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

This well was plugged according to the following procedure. RIH w/ retainer and set at 2992'. Established IR of 3 BPM @ 2,000 psi and then pumped 96 sx of Cl. "C" into 8 5/8" casing and bent tubing below. Pulled up and left 4 sxs on top of retainer then circulated hole w/ 9.5# mud. Perf 4 shots in 8 5/8" csg @ 1749-52'. Set retainer @ 1650 and squeezed w/ 100 sxs Cl "C"; 65 sx outside 31 sx below, and 4 sx on top of retainer. Pulled up hole and circulated 9.5# mud. Layed another plug from 409' to 300'. WOC 2 1/2 hrs and tagged TOC @ 300'. Layed down tbq. Cut off casing 4' below surface and layed 20 sks of cement inside and top of 8 5/8" casing. Backfill and cleanup location. Placed dry hole marker.

Subsurface Safety Valve: Manu. and Type _____ Set @ _____ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED F. L. Dietrich TITLE Area Engineer DATE 6-6-83

(This space for Federal or State office use)
APPROVED BY Orig: Sgd. Charles S. Dutton TITLE CARLEAD RESOURCE AREA DATE 7-30-87
CONDITIONS OF APPROVAL, IF ANY: _____

RECEIVED
FEB 2 1987
OCD
HOBBS OFFICE