

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

N.M. Oil & Gas Division  
P.O. Box 1980  
Hobbs, NM 88241

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT-" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well  
☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator  
Apache Corporation

3. Address and Telephone No.  
2000 Post Oak Blvd., Ste. 100, Houston, Texas 77056-4400 / 713-296-6000

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
660' FSL & 660' FEL Unit P, Sec. 35, T13S, R33E

5. Lease Designation and Serial No.

NM01124

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Willard Beaty # 04

9. API Well No.

30-025-21929

10. Field and Pool, or Exploratory Area

Lazy J Penn

11. County or Parish, State

Lea County, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA


TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> Notice of Intent	<input checked="" type="checkbox"/> Abandonment	<input type="checkbox"/> Change of Plans
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Recompletion	<input type="checkbox"/> New Construction
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Plugging Back	<input type="checkbox"/> Non-Routine Fracturing
	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> Water Shut-Off
	<input type="checkbox"/> Altering Casing	<input type="checkbox"/> Conversion to Injection
	<input type="checkbox"/> Other _____	<input type="checkbox"/> Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Set CIBP @ 9650' w / 35' of cement on top ( 7 sx )  
Pull approximately 7800' of 5-1/2" casing  
Cement plug 7850' - 7750' w / 50 sx } *Tag plugs*  
Cement plug 4250' - 4150' w / 50 sx  
Cement plug 2450' - 2350' w / 50 sx  
Perf 8-5/8" casing @ 2304' and cement squeeze behind casing w / 850 sx ( Circulate cement to surface )  
Cement plug 1150' - 1050' w / 50 sx  
Cement plug 420' - 320' w / 50 sx  
Cement plug 30' - 0' w / 15 sx  
Cement Steel Marker (4" diameter) at least 4' above mean ground level and mark plate w / Apache Corp  
Willard Beaty No. 4, Sec. 35, T13S, R33E

RECEIVED  
1999 JAN 21 A 0:24  
BUREAU OF LAND MGMT.  
ROSWELL RESOURCES AREA

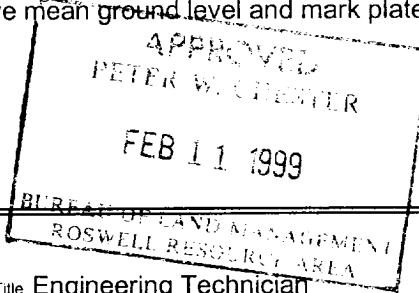

14. I hereby certify that the foregoing is true and correct

Signed

*[Signature]*

Title Engineering Technician

Date

1/13/99

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any:


Title 18 U.S. C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See Instruction on Reverse Side

FW BWW

Willard Beaty # 4  
 Lazy J (Penn) Field  
 API No.: 30-025-21929  
 660' FSL & 660' FEL  
 Sec 35, T13S, R33E  
 Lea County, New Mexico  
 Elevation: 4194' (GR)

**CURRENT COMPLETION**

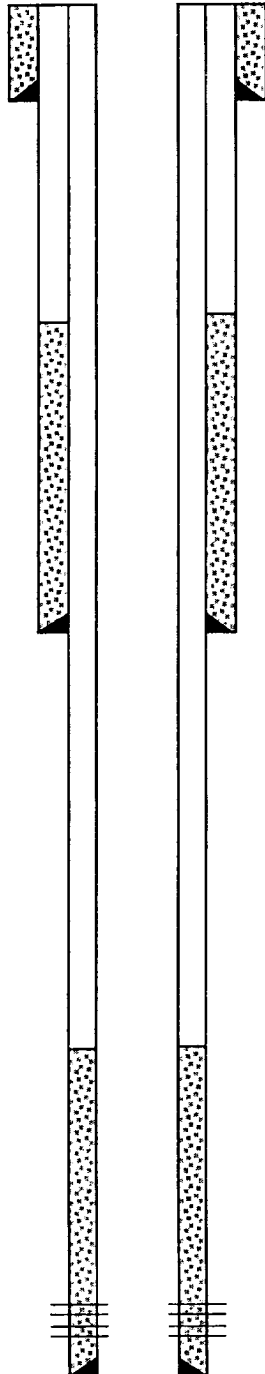

15" Hole  
 11-3/4" 31# CSA 370'  
 Cement w / 400 sx  
 Cement circulated


11" Hole  
 8-5/8" 24 & 32# J-55 CSA 4200'  
 Cement w / 700 sx  
 TOC @ 2304' (TS)

Perfs:  
 9776, 79, 83, 9836, 45, 46, 58,  
 51, 54, 75 (21 Holes)  
 Cement squeeze w / 375 sx  
 9735, 52-57, 76-84, 9845-56  
 (54 Holes)  
 9890-9901, 06-10 (30 Holes)

7-7/8" Hole  
 5-1/2" 17# N-80 & J-55 CSA 9960'  
 Cement w / 500 sx  
 TOC @ 7928' (TS)

TD @ 9960'  
 PBTD @ '

**P & A PROPOSAL**

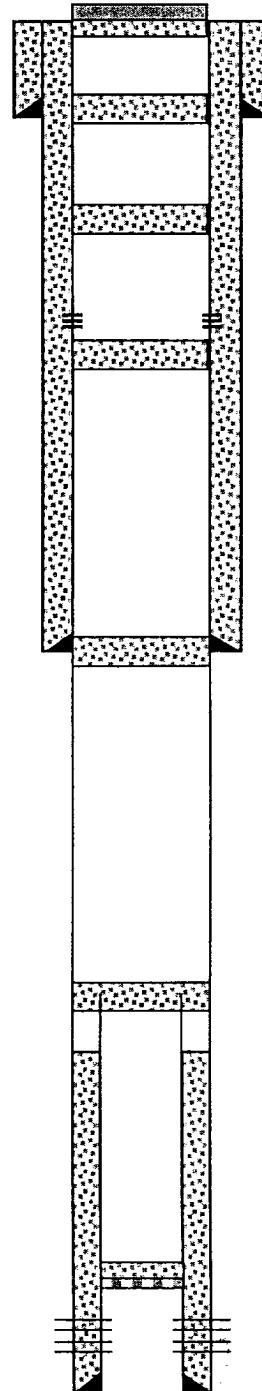

Cement Steel Marker (4" Dia)  
 Cement Plug 30' - 0' w / 15 sx

Cement Plug 420' - 320' w / 50 sx

Cement Plug 1150' - 1050' w / 50 sx

Perf 8-5/8" Csg @ 2304' and  
 cement squeeze behind casing  
 w / 850 sx  
 Circulate cement to surface

Cement Plug 2450' - 2350' w / 50 sx

Cement Plug 4250' - 4150' w / 50 sx

Pull approximately 7800' of 5-1/2" csg  
 Cement Plug 7850' - 7750' w / 50 sx

CIBP @ 9650' w / 35' of cement on top  
 (7 sx)

TD @ 9960'  
 PBTD @