

## DRAWWORKS

Brewster N-75

Drum: 1¼" Lebus grooved

Compound: 2-engine oil bath chain drive

Brake: Hydromatic Parkersburg 40"

## ENGINES

Two 610-H.P. D379TA Caterpillar Diesel.

## DERRICK

Lee C. Moore, 131', 550,000 lb. nominal capacity.

## SUBSTRUCTURE

Lee C. Moore, 14½' high, 550,000 lb. nominal capacity.

## MUD PUMPS

Pump No. 1: Emsco DB700. 700 H.P. with steel fluid end. 4¾" - 7¾" liners, 16" stroke. Compound-driven.

Pump No. 2: NAT C-250, 350 H.P. Powered by D353 Caterpillar Diesel.

## DRILL STRING

3000' 4½" Grade E, 20 lb.

Tool Joints: 4½" H-90, 6¼" OD,

11000' 4½" Grade E, 16.60 lb.

Tool Joints: 4" H-90, 6" OD

Thirty Drilco spiral-grooved 6½" OD, 2¼" ID.

With 4" H-90 Joints.

Other sized drillpipe & drillcollars available.


## BLOWOUT PREVENTERS

One Shaffer LWS hydraulic double 10" x 1500 series. One Hydril 10" x 1500 series.

Choke manifold 4" x 1500 series flanged connections. Payne 4 valve accumulator closing unit.

## MUD SYSTEM

3 - 30 x 7½ x 6 steel pits, with 700 Bbl. capacity. Complete low pressure circulating system, consisting of four submerged mud guns and two counter sunk jets in each pit. System utilizes a 6 x 8 centrifugal pump, powered by diesel.

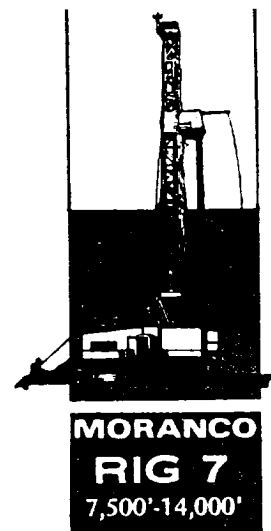

## MUD HOUSE

One - 8' x 30' Steel Storage House

## COMMUNICATIONS

24-Hour direct telephone interconnection through Hobbs (A.C. 505-397-3291) or Midland - Odessa (A.C. 915-563-0562).

## OTHER EQUIPMENT

BLOCKS - Oilwell 350 Ton

HOOK - BJ4300 350 Ton

SWIVEL - NAT N69 350 Ton



LIGHT PLANTS - One 40 KW and one 20 KW AC generators, powered by diesel engines.

LIGHTS - AC fluorescent or mercury - All vapor proof.

SHALE SHAKER - Link belt, single screen.

FRESH WATER STORAGE - two 500 Bbl., horizontal tanks.

HOUSING - 1 - 8' x 36' airconditioned trailer house, with sleeping and cooking facilities.

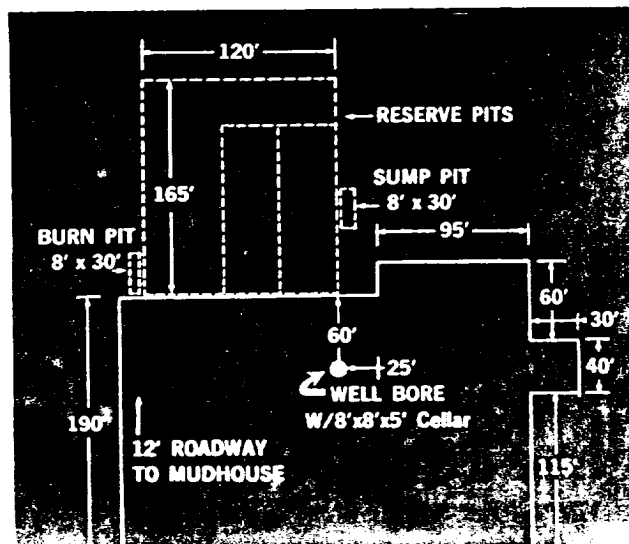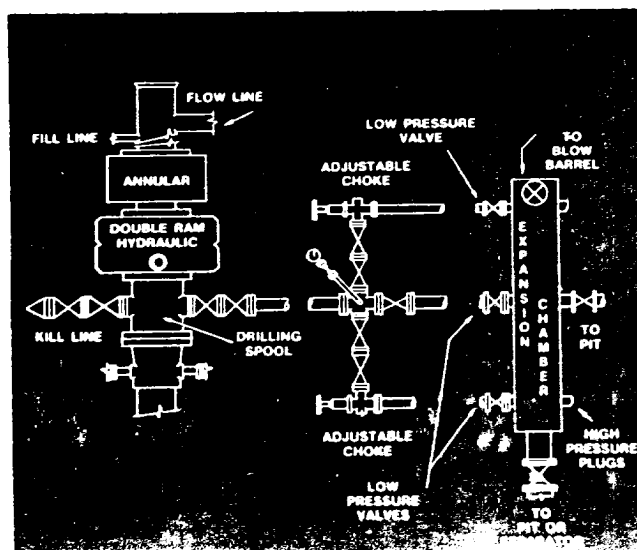

RECEIVED  
MAR 21 1983  
FEDERAL  
HOLDS OFFICE

171

10/3/83  
Amount Bond Reg