

4" liners, 16" stroke. Compound driven
 Pump No. 2: Emeco DB500 500 H.P. powered by D379
 Caterpillar Diesel.

DRILL STRING

4,500' 4½" Grade E, 20-lb.
 9,000' 4½" Grade E, 18.60-lb.
 Tool Joints: 4½" XH, 8¼" OD.
 Twenty-Seven drillcollars 8½" OD, 2¼" ID.
 Twenty-One 8" OD x 2¼" ID Drill Collars
 Other sized drillpipe and drillcollars available.

BLOWOUT PREVENTERS

One Shaffer LWS hydraulic double 11" x 5,000 p.s.i. One
 Hydril 11" x 5,000 p.s.i. Choke manifold 4" x 5,000 p.s.i.
 flanged connections. Koomey Type 80, 7-station
 accumulator closing unit with remote control.

SWIVEL. Drawmaster NOW 350 10H



ROTARY TABLE. Oilwell 20½"

SHALE SHAKER. Totco double at

ELECTRICAL POWER. Two 135-k
 powered by diesel engines. AC flu
 mercury vapor lights. All vapor-pro

FRESH WATER STORAGE. Two 4

HOUSING. One 10' x 44' refrigera
 house with sleeping and cooking f

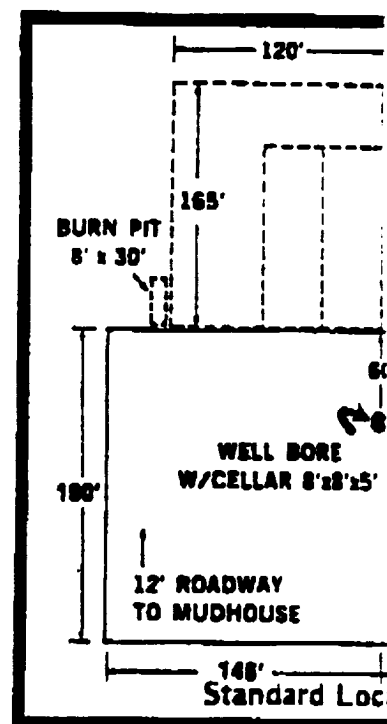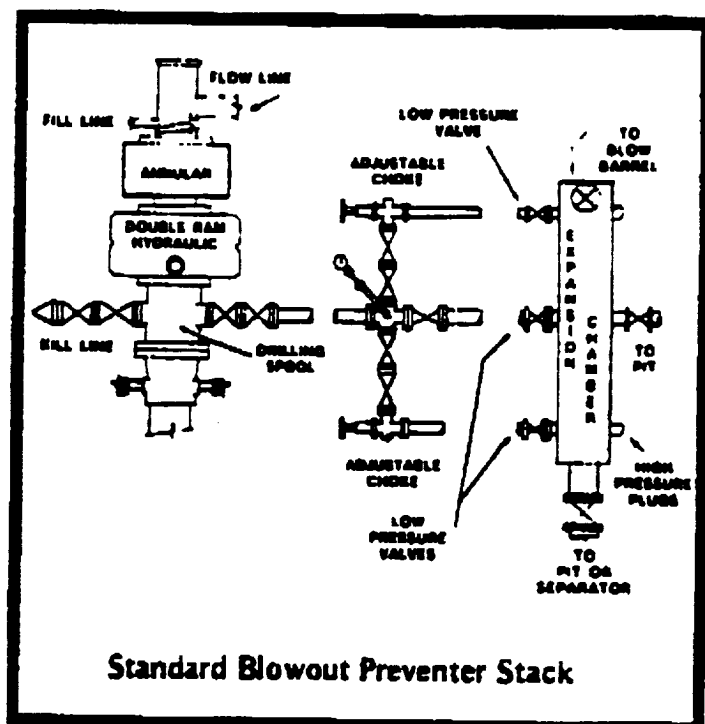

LB/9/16

4.1.17
1.3.17

