


ORIGINAL

NOV 25 1949
HOBBS OFFICE

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

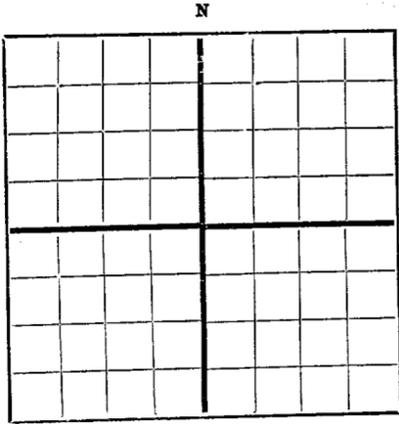

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

W.J. Peterman, operator Portales, New Mexico
Company or Operator Address
Frank & Ola Taylor Well No. 5 in NW corner SW 1/4 Sec. 22, T. 2S
Lease
R. 30E, N. M. P. M., Claudell Field, Roosevelt County.
Well is 330' feet south of the North line and 990' feet west of the East line of sec. 22
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Frank Taylor & Ola M. Taylor Address Waggoner Bldg., Fort Worth, Texas
If Government land the permittee is Address
The Lessee is W.J. Peterman Address Portales, N.M.
Drilling commenced September 15, 1949 Drilling was completed October 1st, 1949
Name of drilling contractor R.B. Nyles Address Portales, N.M.
Elevation above sea level at top of casing 4573 feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from None to No. 4, from to
No. 2, from to No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
7"	20#	10	Lap	470'	Texas				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 600 feet, and from feet to feet
Cable tools were used from 0 feet to 600 feet, and from feet to feet

PRODUCTION

Put to producing, 19
The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

R.B. Nyles, Driller Tom. Nyles, Driller
Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 23rd day of November, 1949
Notary Public
My Commission Expires March 1, 1951
Portales, N.M. November 23-49
Name W.J. Peterman
Position Operator
Representing Myself
Company or Operator
Address Portales, N.M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	3	3	sand
3	15	12	calachie
15	60	45	red shale
60	90	30	gray & red shale
90	110	20	gray shale, light line streaks
110	140	30	red shale
140	160	20	streaks dry sand & shale
160	200	40	red shale & streaks light line
200	230	30	gray shale
230	290	60	cavey red shale
290	600	310	red & brown crushed fault material from 290, where fault cut to bottom of hole at 600'. Hole dry.