


DUPLICATE
FORM C-105

RECEIVED
NOV 21 1950

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

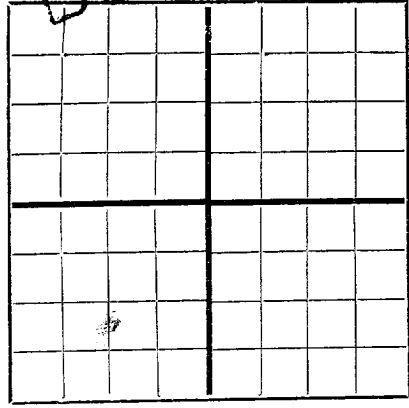

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Company or Operator Portales, New Mexico Address Portales, New Mexico
Well No. 1 in 32 of Sec. 32, T. 32, R. 32, N. M. P. M. Blundell Field, Blundell County.
Well is 1600 feet south of the North line and 3300 feet west of the East line of 32.
If State land the oil and gas lease is No. _____ Assignment No. _____
If patented land the owner is Portales, New Mexico Address Portales, New Mexico
If Government land the permittee is _____ Address _____
The Lessee is _____ Address _____
Drilling commenced Nov 30th 1949 Drilling was completed Nov 1st 1950
Name of drilling contractor J. J. Jones Address Portales, New Mexico
Elevation above sea level at top of casing 4400 feet.
The information given is to be kept confidential until _____ 19____.

OIL SANDS OR ZONES

No. 1, from 1600 to _____ No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.
No. 1, from 1600 to 2000 feet. 40 fresh water
No. 2, from 2500 to 2750 feet. 25 salt water
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	OUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
<u>10</u>	<u>30</u>	<u>8</u>	<u>1.1</u>	<u>205</u>	<u>Portales</u>				<u>Int. off</u>

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>12</u>	<u>10</u>	<u>305</u>	<u>12</u>	<u>dry drill</u>	<u>cable tools</u>	

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters — Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.
Cable tools were used from 0 feet to 5 feet, and from _____ feet to _____ feet.

PRODUCTION

Put to producing Nov 1st 19____.
The production of the first 24 hours was _____ barrels of fluid of which _____% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, Be _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

Driller Portales, New Mexico Driller
Driller J. J. Jones Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 20th day of November, 1950
[Signature]
Notary Public

Portales, New Mexico Nov. 20, 1950
Name [Signature]
Position Operator
Representing _____
Company or Operator
Address 510 Ohio St., Portales, New Mexico

My Commission expires My Commission Expires March 1, 1951

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
100	5	5	sand
100	10	15	caliche
100	15	55	red sh.
100	110	30	sand
110	130	20	blue sh.
130	135	35	fine sand
160	230	65	red sh. (fresh water red; 160-230')
230	250	20	gray & red sh.
250	275	25	C... sand (Santa Rosa)
275	290	15	red sh.
290	350	60	gray & red sh.
350	510	165	red beds
510	570	60	red beds, thin blue streaks
570	620	50	gray & red sh; dark blue streaks
635	677	42	red sh.
677	710	33	blue sh.
710	725	15	red beds
725	740	15	hard dark brown lime
740	750	10	buff color lime
750	760	10	brown sandy lime
760	770	10	gray sh.
770	785	15	gray sand & lime
785	795	10	hard brown lime. top weather
795	815	20	red & gray sand. weather
815	830	15	hard brown lime
830	850	20	red sh & streaks white lime
850	865	35	gray & red sh. S.S.