

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	
FILE	
U.S.G.S.	
LAND OFFICE	
OPERATOR	

NEW MEXICO OIL CONSERVATION COMMISSION

Form C-103  
Supersedes Old  
C-102 and C-103  
Effective 1-1-65

5a. Indicate Type of Lease State <input checked="" type="checkbox"/> Fee <input type="checkbox"/>
5. State Oil & Gas Lease No. <b>L-1661</b>
7. Unit Agreement Name <b>Silas - A</b>
8. Farm or Lease Name <b>Silas A "COM"</b>
9. Well No. <b>1</b>
10. Field and Pool, or Wildcat <b>Wildcat-Gas</b>
12. County <b>Roosevelt</b>

**SUNDRY NOTICES AND REPORTS ON WELLS**  
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER- 2. Name of Operator <b>Phillips Petroleum Company</b>
3. Address of Operator <b>Room 711, Phillips Bldg., Odessa, Texas 79761</b>
4. Location of Well UNIT LETTER <b>I</b> <b>660</b> FEET FROM THE <b>East</b> LINE AND <b>1980</b> FEET FROM THE <b>South</b> LINE, SECTION <b>16</b> TOWNSHIP <b>5-5</b> RANGE <b>32E</b> NMPM.
15. Elevation (Show whether DF, RT, GR, etc.) <b>Later</b>

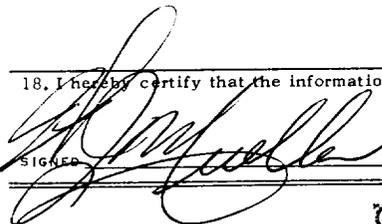
16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK <input type="checkbox"/>	REMEDIAL WORK <input checked="" type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input checked="" type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	CASING TEST AND CEMENT JOB <input type="checkbox"/>
OTHER <input type="checkbox"/>	OTHER <input type="checkbox"/>
PLUG AND ABANDON <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
CHANGE PLANS <input type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

MI & RU Hondo Drilling Company rotary. Spudded 17½" hole at 2 pm, 5-23-73. Drilled to 370'. Set 9 jts (370') 13 3/8" OD 48# H-40 A cond csg at 370'. Howoo cemented w/425 ax Incer-8r cmt w/2% cm Cl2, 1# Flecole/ax in first 200 ax. Plug to 335' w/53 Bw, max press 300#. Job complete 4:30 am, 5-24-73. Circ 140 ax cmt. WOC 18 hr, tested csg w/1000# for ½ hr, Ok. WIH w/11" bit, drld cmt 335-370', started drlg ahead w/11" bit at 370'.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED  **W.J. Mueller** TITLE **Senior Reservoir Engineer** DATE **5-25-73**

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE **JUN 1973**

CONDITIONS OF APPROVAL, IF ANY: