


DOUBLE PREVENTER OPTION

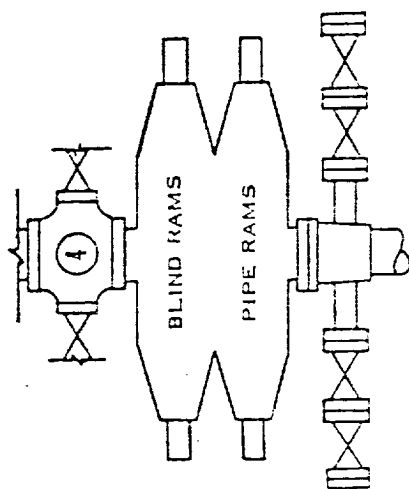

FILL-UP CONNECTION

KILL LINE

EMERGENCY KILL LINE

CHOKE OPTION "A" OR "B" MAY BE SUBSTITUTED

CHOKE OPTION "B"

CHOKE OPTION "A"

- 1 SER. 900 HYDRIL "GK"
- 2 SER. 900 RAM-TYPE BOP
- 3 3" SER. 900 VALVE
- 4 SER. 900 DRILLING SPOOL
- 5 3" SER. 900 X 2" SER. 900 STEEL TEE
- 6 2" SER. 900 VALVE
- 7 2" MUD PRESSURE GAUGE
- 8 3" SER. 900 X 2" SER. 900 STEEL CROSS
- 9 2" SER. 900 ADJ. CHOKE
- 10 HYDRAULIC CHOKE, 2500 PSI WP OR BETTER
- 11 3" SER. 900 CHECK VALVE

NOTES:

1. 3000 PSI WP OR BETTER CLAMP HUBS MAY BE SUBSTITUTED FOR FLANGES
2. ONE ADJUSTABLE CHOKE MAY BE REPLACED WITH A POSITIVE CHOKE
3. VALVES MAY BE EITHER HAND OR POWER OPERATED BUT, IF POWER OPERATED, THE VALVES FLANGED TO THE BOP RUN MUST BE CAPABLE OF BEING OPENED AND CLOSED MANUALLY OR CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY

..... OPTIONAL EQUIPMENT

PHILLIPS PETROLEUM COMPANY
3000 PSI WORKING PRESSURE
BLOWOUT PREVENTER HOOK-UP
(SERIES 900 FLANGES OR BETTER)

REV 6/73

FIGURE NO. 6

171

172