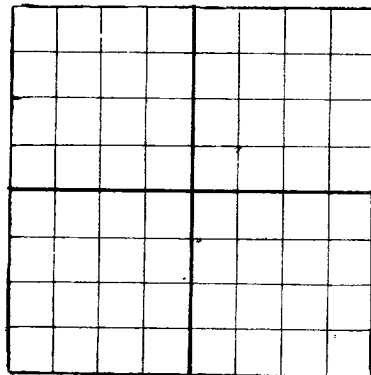


N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Phillips Petroleum Company Box 6666 Odessa, Texas
Company or Operator Address
Lexco Well No. **1** in **SE/4** of Sec. **2**, T. **17S**
Lease
R. **32E** N. M. P. M. **Unnamed** Field, **Lea** County.
Well is **1980** feet south of the **N** line and **1980** feet west of the East line of **Section 2**
If State land the oil and gas lease is No. **B-3610** Assignment No. **--**
If patented land the owner is _____ Address _____
If Government land the permittee is _____ Address _____
The Lessee is **Phillips Petroleum Company** Address **Bartlesville, Oklahoma**
Drilling commenced **March 2** 19 **45** Drilling was completed **April 24** 19 **45**
Name of drilling contractor **Corbett Drilling Co.** Address **Tulsa, Oklahoma**
Elevation above sea level at top of casing **4264.83** feet.
The information given is to be kept confidential until **No longer confidential** 19 _____

OIL SANDS OR ZONES

No. 1, from **4150'** to **4298' - T.D.** No. 4, from _____ to _____
No. 2, from _____ to _____ No. 5, from _____ to _____
No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **No water.** to _____ feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8-5/8	28#	3-1/2"	H-40	1456.52	Baker	-	-	-	Surface
5-1/2	14#	3"	H-40	4133.43	Howco	-	-	-	Oil String

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8	1473.92	650	Halliburton	No mud used except for drilling purpose.	
7-7/8"	5-1/2	4144.57	250	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material **None used** Length _____ Depth Set _____
Adapters—Material **None used** Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
4"x20	7	S.N.G.	140 qts	4-29-45	4170-4230'	4271'

Results of shooting or chemical treatment **Flowed 12 hours, 14/64" choke, 52 bbls. oil.**

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **4150'** feet, and from _____ feet to _____ feet
Cable tools were used from **4150'** feet to **4298'** feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing **April 25** 19 **45**
The production of the first 24 hours was **57** barrels of fluid of which **100** % was oil; **0** % emulsion; **0** % water; and **0** % sediment. Gravity, Be. **34.3**
If gas well, cu. ft. per 24 hours **--** Gallons gasoline per 1,000 cu. ft. of gas **--**
Rock pressure, lbs. per sq. in. **--**

EMPLOYEES

_____, Driller _____, Driller
_____, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **31st****Odessa, Texas** **May 31, 1945**

Place

Date

day of **May** 19 **45**Name **H. B. Rolson**Position **Chief Clerk**Representing **PHILLIPS PETROLEUM COMPANY**

Company or Operator

Address **Box 6666 Odessa, Texas**My Commission expires **June 1, 1945****Eldon M. Ball**
Notary Public

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	40	40	Surface sand.
40	60	20	Caliche.
60	155	95	Sand.
155	680	525	Red beds.
680	1185	505	Red bed, red rock, and shells.
1185	1215	30	Lime.
1215	1265	50	Lime and anhydrite.
1265	1476	211	Red rock and anhydrite.
1476	1520	44	Anhydrite.
1520	1980	460	Salt.
1980	2370	390	Salt, shells, and potash.
2370	2675	305	Anhydrite.
2675	3315	640	Gyp and anhydrite.
3315	3550	235	Anhydrite.
3550	3625	75	Gyp and lime.
3625	3825	200	Gyp and anhydrite.
3825	3950	125	Anhydrite.
3950	4298	348	Lime. T.D.