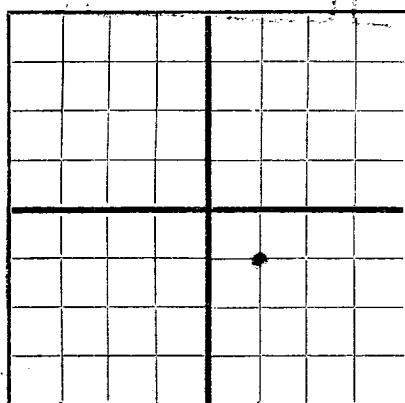


RECEIVED
SEP 21 1949NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New MexicoCons. Comm.
Artasla OfficeAREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

BOLLER & NICHOLS 901 Mercantile Securities Bldg., Dallas, Texas
Company or Operator Address
Lease Well No. 8 in NW SE of Sec. 3, T. 17S
R. 32E, N. M. P. M., Roberts Field, Lea County.
Well is 3300 feet south of the North line and 1990 feet west of the East line of Sec. 3
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Address
If Government land the permittee is Address
The Lessee is **Boller & Nichols** Address **Dallas, Texas**
Drilling commenced **June 21** 1949 Drilling was completed **August 28** 1949
Name of drilling contractor **Suppes and Suppes** Address **Artasla, New Mexico**
Elevation above sea level at top of casing **4285** feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 4081 to 4090 No. 4, from to
No. 2, from 4199 to 4210 No. 5, from to
No. 3, from 4337 to 4344 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 300 to 370 feet.
No. 2, from 400 to 420 feet.
No. 3, from 3455 to 3470 feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8	24	8	Nat	1410	Tex				
7	20	8	Nat	3496	Tex	3432			
5 1/2	14	8	Nat	4058	Tex				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
	8 5/8	1410	50	Welliburton		Circulated to surface
	7"	3496				10 sacks Aquagel
	5 1/2"	4058	100	"		10 sacks Aquagel

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
4"		Glycerine	130	8-29	4353	4353
4"		"	200	9-1	4200	4353

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 1410 feet, and from feet to feet
Cable tools were used from 1410 feet to 4353 feet, and from feet to feet

PRODUCTION

Put to producing Sept. 12, 1949
The production of the first 24 hours was 40 barrels of fluid of which 100% was oil; %
emulsion; % water; and % sediment. Gravity, Be 37
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

Clyde Galloway Driller E. I. Glover Driller
Harvey Flynn Driller Max Stephens Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 19th

Dallas, Texas 9-19-49

day of September, 1949

Name Leonard Nichols

Position Joint Owner

Representing BOLLER & NICHOLS

Company or Operator

My Commission expires 6-1-1951

Address 901 Mercantile Securities Bldg.,
Dallas, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	250	250	Sand & Caliche
250	300	50	Red Rock
300	370	70	Water sand
370	400	30	Red Rock
400	420	20	Water sand
420	1260	840	Red rock
1260	1400	140	Anhydrite
1400	2300	900	Salt
2300	3455	1155	Anhydrite
3455	3470	15	Red sand
3470	3915	445	Anhydrite
3915	4081	166	Lime
4081	4090	9	Sandy lime
4090	4199	109	Lime
4199	4210	11	Sandy lime
4210	4216	6	Lime
4216	4337	121	White lime
4337	4344	7	Sandy lime
4344	4353	9	Grey lime