


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD 2 PM 1 37

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPPLICATE. If State Land submit 6 Copies

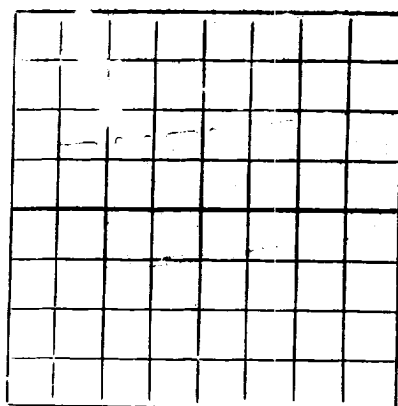

AREA 640 ACRES
LOCATE WELL CORRECTLY

Leonard Nichols

A.C. Taylor

(Company or Operator)

(Lease)

Well No. # 1, in NW 1/4 of SE 1/4, of Sec. 9, T. 17, R. 32, NMPM.

Maljumar

Pool, Lea

County.

Well is 1980 feet from South line and 1980 feet from East line

of Section 9. If State Land the Oil and Gas Lease No. is Patented

Drilling Commenced April 9-1960, 19. Drilling was Completed April 19-1960, 19.

Name of Drilling Contractor Dual Drilling Company

Address Wichita Falls, Texas

Elevation above sea level at Top of Tubing Head 4084. The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from 3645 to 3820 No. 4, from 4099 to 4121
No. 2, from 3820 to 3830 No. 5, from to
No. 3, from 3970 to 4091 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8 5/8	28	Used	313	Regular			
5 1/2	14	New	4121	First			Halliburton

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/4	8 5/8	313	200	Circulate		
7 7/8	5 1/2	4121	150			

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Halliburton fractured w/ 30,000 gallons refined oil and 77,000 lbs. sand. Obtained good results

Result of Production Stimulation

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0- feet to 4121 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

April 29 60
Put to Producing, 19
OIL WELL: The production during the first 24 hours was 192 barrels of liquid of which 100 % was
was oil; % was emulsion; % water; and % was sediment. A.P.I.
Gravity 35
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of
liquid Hydrocarbon. Shut in Pressure lbs.
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico			Northwestern New Mexico		
T. Anhy.			T. Devonian		T. Ojo Alamo
T. Salt	1060		T. Silurian		T. Kirtland-Fruitland
B. Salt			T. Montoya		T. Farmington
T. Yates			T. Simpson		T. Pictured Cliffs
T. 7 Rivers			T. McKee		T. Menefee
T. Queen			T. Ellenburger		T. Point Lookout
T. Grayburg	3645		T. Gr. Wash		T. Mancos
T. San Andres			T. Granite		T. Dakota
T. Glorieta			T.		T. Morrison
T. Drinkard			T.		T. Penn
T. Tubbs			T.		T.
T. Abo			T.		T.
T. Penn			T.		T.
T. Miss			T.		T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	1060		gyp and red beds				
1060	2175		Salt				
2175	3645		anhy.				
3645	3820		Lime				
3820	3830		Oil and gas sand				
3830	3930		Lime				
3930	3970		Brecken lime and sand				
3970	4091		Lime				
4091	4099		Sandy Lime				
4099	4121		Lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

4-30-60
(Date)

Company or Operator Leonard Nichols
Name O. S. Nichols
Address Maljamar, New Mexico
Position or Title Supt.