


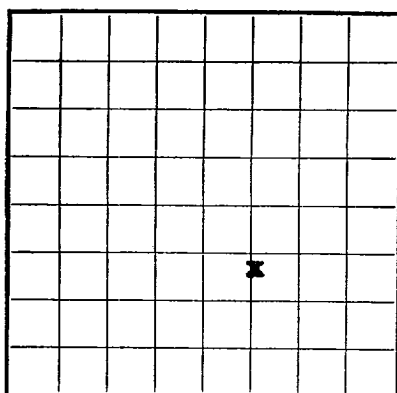

LOCATE WELL CORRECTLY

RECEIVED

SEP 12 1962

UNITED STATES

D. C. DEPARTMENT OF THE INTERIOR
ARTESIA, OFFICE

GEOLOGICAL SURVEY

RECEIVED

SEP 11 1962

U. S. GEOLOGICAL SURVEY
ARTESIA, NEW MEXICO

LOG OF OIL OR GAS WELL

Company Bell & Nichols Address Maljamar, New Mexico
Lessor or Tract Iles Field Maljamar State New Mexico
Well No. 25 Sec. 10 T. 17 R. 32 Meridian N.M.P.M. County Lea
Location 1980 ft. N. of N. Line and 1980 ft. E. of E. Line of 10-17-32 Elevation 4153'
(Derrick floor relative to sea level)

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed E. L. McCutcheonDate September 8, 1962Title Supt.

The summary on this page is for the condition of the well at above date.

Commenced drilling August 8, 1962 Finished drilling August 18, 1962

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

No. 1, from 3894 to 3900 No. 4, from 4046 to 4052
No. 2, from 3923 to 3933 No. 5, from _____ to _____
No. 3, from 4018 to 4034 No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
8 5/8	302	200	Halliburton	302	1180	3894	3894	3900	
5 1/2	4120	350	Halliburton	4120	3923	3923	3923	3933	
						4018	4018	4034	
						4046	4046	4052	

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
8 5/8	302	200	Halliburton		
5 1/2	4120	350	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth set _____

Adapters—Material _____ Size _____

SHOOTING RECORD

Size	Shell used	Explosive used	Quantity	Date	Depth shot	Depth cleaned out
Sand Fraced 25,000 Gal Refined Oil, 44,000 lbs Sand						

TOOLS USED

Rotary tools were used from 0 feet to 4120 feet, and from _____ feet to _____ feet

Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

September 8, 1962Put to producing September 17, 1962The production for the first 24 hours was 52 barrels of fluid of which 100% was oil; _____% emulsion; _____% water; and _____% sediment. Gravity, °Bé. 35.3

If gas well, cu. ft. per 24 hours _____

Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

_____, Driller _____, Driller

_____, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	1180	1180	Red Bed & Gyp
1180	2170	990	Salt
2170	2470	300	Salt & Anhydrite Breaks
2470	3760	1290	Anhydrite
3760	3894	134	Lime
3894	3900	6	Sandy Lime
3900	3923	23	Lime
3923	3933	10	Oil Sand
3933	4018	85	Lime
4018	4034	16	Sandy Lime Oil
4034	4046	12	Lime
4046	4052	6	Oil Sand
4052	4120	72	Lime
			Taken from Electric Log
FROM—	TO—	TOTAL FEET	FORMATION

