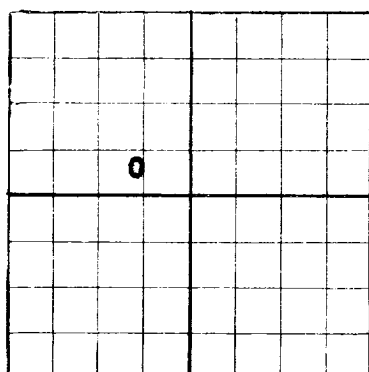



N

AREA 640 ACRES
LOCATE WELL CORRECTLY

DUPLICATE

NEW MEXICO OIL CONSERVATION

Santa Fe, New Mexico



WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

The Ohio Oil Company

Box 1607 - Hobbs, New Mexico

Company or Operator

Address

W. B. Trimble Well No. 2 In SW/4, NE/4 of Sec. 11, T. 17-S

R. 32-E N. M. P. M. West Roberts Field, Lea County.

Well is 1980 feet south of the North line and 1980 feet west of the East line of Sec. 11

If State land the oil and gas lease is No. 1980 Assignment No.

If patented land the owner is W. B. Trimble et al Address Seminole, Texas

If Government land the permittee is Address

The Lessee is The Ohio Oil Company Address Box 1607 - Hobbs, N. Mex.

Drilling commenced July 30, 1946 Drilling was completed September 3, 1946

Name of drilling contractor The W-O Construction Co. Address Hobbs, New Mexico

Elevation above sea level at top of casing 4149 feet.

The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	Comp/
8-5/8"	32#	8 rd.	Sals	1387' 8"	HOWCO				500
5-1/2"	14#	"	"	3969' 11"	Baker				550
2-3/8"	4.7#	"	"	4054' 2"	Torp. End.		4014'	4017'	Bottom Jt.

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8	1379'	500			
7-3/8"	5-1/2	3945'	550			

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Nitro-Glycerine	230 Qts	9-4-46	3978'-4088'	4104'

Results of shooting or chemical treatment After shooting with 230 Qts. well flowed 170 B/O in 24 hours thru 1/2" choke.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 4104' feet, and from feet to feet

Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing September 13, 1946

The production of the first 24 hours was 170 B/O barrels of fluid of which 100 % was oil; % emulsion; % water; and % sediment. Gravity, Be 39

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

A. T. Coleman

Driller

R. B. Fraysher

Driller

M. C. West

Driller

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 24th

Hobbs, New Mexico Sept. 24, 1946

day of September 19 46

Name J. B. Reese

Position Foreman

Representing The Ohio Oil Company

Company or Operator

Address Box 1607 - Hobbs, New Mexico

Notary Public
MY COMMISSION EXPIRES AUG. 18, 1947

My Commission expires

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	1090	1090	Red beds
1090	1380	290	Anhydrite and red shale
1380	2490	1110	Salt
2490	2810	320	Anhydrite
2810	3010	200	Anhydrite, red shale & Lime
3010	3370	360	Anhydrite & red shale
3370	3420	50	Red sand & Anhydrite (Artesia Red Sand)
3420	3450	30	Anhydrite & red shale
3450	3860	410	Anhydrite, dolomite & red shale
3860	3910	50	Dolomite & Anhydrite
3910	3970	60	Dolomite, Anhydrite & red shale
3970	4005	35	Dolomite, shale & sand
4005	4104	99	Dolomite, sand, sandy dolomite & Gray Shale.