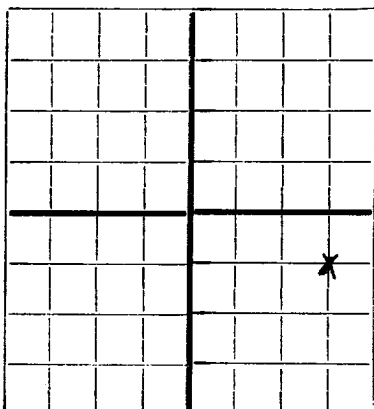


N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

The Ohio Oil Company Box 1607 Hobbs, New Mexico
Company or Operator Address
W. B. Trimble Well No. 3 NE 1/4, SE 1/4 of Sec. 11, T. 17-S
Lease
R. 32-E, N. M. P. M., West Roberts Field, Lea County.
Well is 3300 feet south of the North line and 660 feet west of the East line of Sec. 11, T 17-S, R 32-E
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is W. B. Trimble, et al Address Seminole, Texas
If Government land the permittee is Address
The Lessee is The Ohio Oil Company Address Box 1607, Hobbs, N. Mex.
Drilling commenced 9:00 P. M. Nov. 27, 1946 Drilling was completed 1:00 P. M. Jan. 11, 1947
Name of drilling contractor W-G Constructio Co. Address Hobbs, New Mexico
Elevation above sea level at top of casing 4172 feet DP 4180'
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from Yates 2550' to No. 4, from to
No. 2, from 4040' to 4209' No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8-5/8"	28#	8R	Spang	1165'	HOWCO				
5 1/2	14	8R	"	4047	"				
2-3/8Tbg.	4.7	8R	"	4124	Torpedoed end				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
11	8-5/8	1162	500	Halliburton		
7-3/8	5 1/2	4020	375	"		
4-3/4	2-3/8	4104	--			

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Nitro-glycerin	260 qts	1-12-47	4053 to 4181	TD 4209'

Results of shooting or chemical treatment After shooting W/ 260 qts from 4053' to 4181' well flowed 60 B/O in 24 hrs. W/ GOR 871:1

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from surface feet to TD 4209 feet, and from feet to feet
Cable tools were used from feet to feet, and from feet to feet

PRODUCTION

Put to producing February 1, 1947
The production of the first 24 hours was 60 B/O barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be. 36.8 @ 60 degrees
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

C. S. McClary, Driller W. P. Dodson, Driller
M. C. West, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 7th

Hobbs, New Mexico March 7, 1947

day of March, 1947

Name J. B. Stewart

Position Superintendent

Representing The Ohio Oil Company
Company or Operator

Address Box 1607, Hobbs, New Mexico

Notary Public
MY COMMISSION EXPIRES AUG. 19, 1947

My Commission expires

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20	20	Caliche
20	435	415	Red Bed & Sand
435	1095	660	Red Bed & Shale
1095	1123	28	Red Bed & Anhydrite
1123	1175	52	Anhydrite
1175	1240	65	Anhydrite & Salt
1240	1390	150	Anhydrite & Sand
1390	2500	1110	Anhydrite & Salt
2500	2785	285	Anhydrite & Sand
2785	3360	575	Lime Gyp & Anhydrite
3360	3480	120	Lime & Anhydrite
3480	3905	425	Lime & Anhydrite
3905	4030	125	Lime
4030	4209	179	Sandy Lime
DEVIATION SURVEY			
	Depth Taken	Degrees off Vertical	
	250	0	
	500	0	
	750	0	
	1000	0	
	1250	1	
	1500	1	
	1750	1	
	2000	1	
	2250	1	
	2500	1	
	2750	1	
	3000	1	
	3250	1	
	3500	1	
	3750	1	
	4000	1	