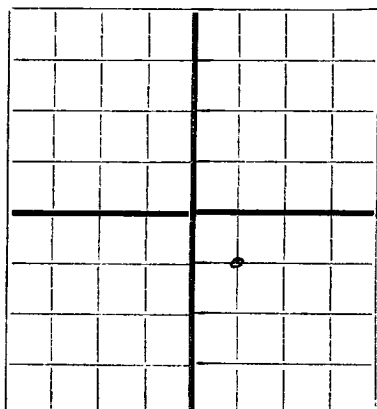



N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD



Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

The Ohio Oil Company

Hobbs, New Mexico

W. B. Trimble

Company or Operator

Address

Well No. 4

in NW/4, SE/4

of Sec. 11

T. 17-S

Lease

R. 32-E

N. M. P. M.

West Roberts

Field,

Lea

County.

Well is 3300

feet south of the North line and

1980

feet west of the East line of

Sec. 11-17-32

If State land the oil and gas lease is No.

Assignment No.

If patented land the owner is

W. B. Trimble

Address

Seminole, Texas

If Government land the permittee is

Address

The Lessee is

The Ohio Oil Company

Address

Hobbs, New Mexico

Drilling commenced February 6,

1947

Drilling was completed

March 9,

1947

Name of drilling contractor

Chas. Blount Drilling Company

Address

Oklahoma City, Oklahoma

Elevation above sea level at top of casing

4138

feet.

The information given is to be kept confidential until

19

OIL SANDS OR ZONES

No. 1, from 3972'

to

4125'

No. 4, from

to

No. 2, from

to

No. 5, from

to

No. 3, from

to

No. 6, from

to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from

to

feet.

No. 2, from

to

feet.

No. 3, from

to

feet.

No. 4, from

to

feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8-5/8"	28	8 R	Spang	1154'	10" HOWCO				
5-1/2"	15	8 R	"	3965'	1" HOWCO				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8"	1156'	350	Halliburton		
7-3/8"	5-1/2"	3953'	500	"		

PLUGS AND ADAPTERS

Heaving plug—Material

Length

Depth Set

Adapters—Material

Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Nitro	380 qts.	March 11-47	3972-4125	

Results of shooting ~~chemical treatment~~ Well made 20.48 B/o in 24 hrs. thru open 1" choke

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from surface feet to 4125 feet, and from - feet to - feet

Cable tools were used from - feet to - feet, and from - feet to - feet

PRODUCTION

Put to producing June 16, 1947

The production of the first 24 hours was 20.48 barrels of fluid of which 100% was oil;

emulsion; % water; and % sediment. Gravity, Be. 36.2 @ 60

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

B. A. Long

Driller

L. F. Warnick

Driller

Arthur Stine

Driller

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 27th

Hobbs, New Mexico

6-27-47

Notary Public

Name

Position

Representing

The Ohio Oil Company

Company or Operator

Address Box 1607 Hobbs, New Mexico

MY COMMISSION EXPIRES AUG. 19, 1948

My Commission expires

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	989	989	Red Bed
989	1068	79	Red Bed Shells
1068	1103	35	Red Bed
1103	1250	147	Anhydrite
1250	1680	430	Shells
1680	1858	178	Salt and Shells
1858	2115	257	Salt, Anhydrite & Shells
2115	2403	288	Salt
2403	2629	226	Anhydrite & Salt
2629	2708	79	Anhydrite
2708	2835	127	Anhydrite & Gyp.
2835	2918	83	Anhydrite & Lime
2918	2935	17	Anhydrite
2935	3002	67	Dolomite
3002	3072	70	Lime
3072	3121	49	Dolomite
3121	3275	154	Lime
3275	3325	50	Lime & Hard Sand
3325	3955	630	Lime
3955	4125	170	Sandy Lime

DEVIATION SURVEY

Depth Taken	Degrees off Vertical
500	0
1060	0
1120	0
1700	0
2000	0
2014	1
2250	1
2350	1
2500	0
2740	0
3000	0
3290	0
3400	1
3583	0
4025	0