



NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD



Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

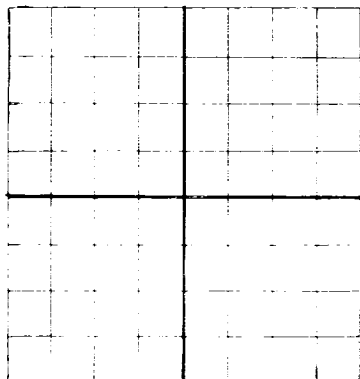

AREA 640 ACRES
LOCATE WELL CORRECTLY

R. W. Fair **Box 516, Artesia, N. M.**
Company or Operator Address
Baish (Federal) Well No. **1** in **SE 1/4** of Sec. **22**, T. **17 S**
Locate
R. **32 E** N. M. **Maljamar** Field, **Log** County.
Well is **660** feet south of the North line and **660** feet west of the East line of **Sec. 22-17-32.**
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Address
If Government land the permittee is **M. E. Baish** Address **Artesia, N. M.**
The Lessee is **R. W. Fair** Address " "
Drilling commenced **11/7/39** 19 Drilling was completed **1/3/40** 19
Name of drilling contractor **C. C. Dodson - Barney Cookburn** Address **Artesia, N. M.**
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from 3997 to 4015	No. 4, from to
3851 to 3865	
No. 2, from 3817 to 3829	No. 5, from to
No. 3, from 3768 to 3783	No. 6, from to
3756 to 3764	

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet
No. 2, from to feet
No. 3, from to feet
No. 4, from to feet

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	GET & FILLED FROM	PERFORATED FROM TO	PURPOSE
12 1/2" 7"OD	40# 20#	10 10		20' 3554'	Plain "			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
8" 7"OD	12 1/2" 20'	3554'	20 400	Halliburton	Heavy	Circulated

PLUGS AND ADAPTERS

Heaving plug - Material Length Depth Set
Adapters - Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
3 1/2"	Tin	Nitro	100 qts.	1/8	3959-4011	4011

Results of shooting or chemical treatment

Flowed 250 bbls. of oil in 10 hours thru casing. Cleaned out and run 3820 ft. of 2 in. tubing. Made 20 bbls. per for six hours thru tubing.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from **0** feet to **3807** feet, and from feet to feet
Cable tools were used from **3807** feet to **4015** feet, and from feet to feet

PRODUCTION

Put to producing **1/16/40** 19
The production of the first 2 **8** hours was **120** barrels of fluid of which **100** % was oil; % emulsion; % water; and % sediment. Gravity Be
If gas well, cu. ft. per 24 hours. Gallons gasoline per 1,000 cu. ft. of gas.
Rock pressure, lbs. per sq. in.

EMPLOYEES

M. E. Lewis Driller **Otto Barnett** Driller
B. B. McDonald Driller Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this **14** day of **January** **1940**
Notary Public
My Commission expires **2/28/40**
Artesia, N. M. **1/18/40**
Book-keeper
R. W. Fair
Box 516, Artesia, N. M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20	20	Surface Sand
20	200	180	Red Bed & Gravel
200	450	250	Red Rock & Gyp
450	540	90	Red Rock
540	665	125	Red Rock & Shells
665	840	175	Red Rock
840	890	50	Shells & Anhydrite
890	1047	157	Anhydrite & Red Rock
1047	1135	88	Salt & Shells
1135	1465	330	Salt, Anhydrite & Shells
1465	1727	262	Salt & Shells
1727	1810	83	Salt
1810	2025	215	Anhydrite & Red Rock
2025	2108	83	Anhydrite
2108	2237	129	Anhydrite & Shells
2237	2455	218	Anhydrite
2455	2495	40	Anhydrite & Lime Shells
2495	2640	555	Anhydrite
2640	3105	465	Broken Lime
3105	3122	17	Anhydrite
3122	3153	31	Lime
3153	3155	2	Lime & Anhydrite
3155	3201	46	Anhydrite
3201	3298	97	Lime
3298	3418	120	Lime & Sandy Lime
3418	3453	35	Lime
3453	3465	12	Lime & Sandy Lime
3465	3483	18	Lime Saturated
3483	3706	223	Sandy Lime
3706	3746	40	Lime
3746	3750	4	Broken Sand, Oil Show
3750	3843	93	Lime
3843	3858	15	Sandy Lime
3858	3864	6	Oil Sand
3864	3883	19	Sand & Sandy Lime
3883	3898	15	Lime
3898	3898	0	Sandy Lime
3898	3997	101	Lime
3997	4015	18	Oil Sand

Total Depth, 4015'