

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☐ Gas Well ☒ Other WIW

2. Name of Operator

The Wiser Oil Company

3. Address and Telephone No.

207 W. McKay, Carlsbad, NM 88220 (505)885-5433

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

660' FNL & 1980' FEL, Unit B
Section 24 17S 32E

FORM APPROVED

Budget Bureau No. 1004-0135
Expires: March 31, 1993

5. Lease Designation and Serial No.

LC 059152 B

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Johns B DE #8

9. API Well No.

30-025-

10. Field and Pool, or Exploratory Area

Maljamar Grayburg San Andre

11. County or Parish, State

Lea, NM

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Re-Entry

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

02/14/94 - 02/24/94 - Installed BOP. Drilled and milled to 4360'.

02/25/94 - Ran 4" 11.34# casing and set @ 4360'. Cemented w/275 sx Premium Plus cmt. Circulated 60 sx to pit.

03/01/94 - Drilled out cement to 4345'. Ran CBL & CNL.


03/02/94 - Perf'd the following intervals: 3979, 80, 81, 4041, 42, 43, 77, 78, 79, 4104, 05, 06, 32, 40, 41, 45, 46, 56, 58, 59, 64, 65, 66, 79, 80, 4230, 33, 35, 36, 37, 39, 4316, 17, 18, 19, 20 (36 holes).

03/03/94 - Acidized perfs 3979-4320 w/3500 gal 15% NEFE acid.

03/09/94 - Ran 4" 11.34# Elder plastic coated packer & 124 jts 2 3/8" plastic coated tubing. Set packer @ 3907'. Tested 4" annulus to 350 psi for 15 min. Held good. Well ready for injection.

14. I hereby certify that the foregoing is true and correct

Signed

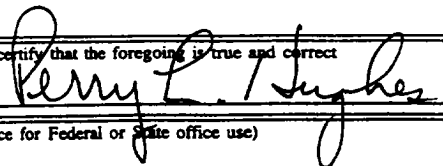

Title

Agent

Date


3/25/94

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:

Title



Date