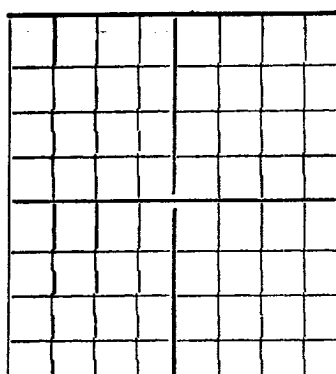


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

HOURS OFFICE

WELL RECORD

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Foundation, Fair & Pope Box #2, Loco Hills, N. Mex.
Company or Operator Address
Johns Well No. 1-A SW 1/4 of NE 1/4 of Sec. 26, T. 17 S.
Lease
S2 22 E, N. M. P. M., Maljamar Field, Lea County.
Well is 1980 feet south of the North line and 1980 feet west of the East line of Sec. 26-17S-32E.
If State land the oil and gas lease is No. Assignment No.
If patented land the owner is Address
If Government land the permittee is Address Las Cruces #055405(a)
The Lessee is Address
Drilling commenced 12/2/41 19 Drilling was completed 1/25/42 19
Name of drilling contractor Brewer Drilling Co., Address Artesia, N. M.
Elevation above sea level at top of casing feet.
The information given is to be kept confidential until 19.

OIL SANDS OR ZONES

No. 1, from 3930 to 3945 No. 4, from to
No. 2, from 4090 to 4100 No. 5, from to
No. 3, from 4115 to 4179 No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.
No. 2, from to feet.
No. 3, from to feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
8 1/2"	28#	10	Plain	985'	Plain			
7"OD	20#	8	Plain	3636'	"			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8 1/2"	985'	50	Halliburton	Heavy	6 tons
8"	7"OD	3636'	200	"	"	5 tons

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	Tin	Nitro	130 qts.	1/28/42	4110-75	4180'

Results of shooting or chemical treatment Cleaned out to bottom and run 21 4100' of 2" EUE tubing. Flowed 90 bbls on 3 hrs test with 1/2" choke. Next day flowed 70 bbls on 3 hrs test, same choke.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet
Cable tools were used from 0 feet to 4180 feet, and from feet to feet

PRODUCTION

Put to producing 2/1/42, 19.
The production of the first 25 hours was 90 barrels of fluid of which 100 % was oil; % emulsion; % water; and % sediment. Gravity, Be.
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

L. Newton, Driller T. Jacobs, Driller
Skeet Hill, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 11 day of Feb., 1942
Blas. A. Carter Notary Public.
My Commission expires 11-27-43
Artesia, N. M. Feb. 7, 1942
Name Arnan P. Giller
Position Book-keeper
Representing Foundation, Fair & Pope
Address Box #2 Loco Hills, N. Mex.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	25	25	Calechie
25	220	225	Red Rock
220	245	25	Blue Shale
245	655	410	Red Rock
655	710	55	Sandy Red Rock
710	775	65	Red Sand
775	850	75	Sand & Red Rock
850	1000	150	Red Rock
1000	1015	15	Anhydrite
1015	1045	30	Red Rock
1045	1055	10	Anhydrite & Red Rock
1055	1140	85	Anhydrite
1140	1160	20	Anhydrite & Red Rock
1160	1190	30	Red Rock
1190	1200	10	Salt & Red Rock
1200	1815	615	Salt & Potash
1815	1885	70	Salt
1885	2035	150	Salt & Potash
2035	2075	40	Anhydrite & Red Rock
2075	2145	70	Salt & Red Rock
2145	2215	70	Salt & Potash
2215	2250	35	Anhydrite
2250	2310	60	Anhydrite (broken)
2310	2415	105	Anhydrite
2415	2580	165	Anhydrite & Red Rock
2580	2750	170	Anhydrite
2750	2755	5	Red Sand
2755	3385	630	Anhydrite
3385	3430	45	Sandy Lime
3430	3490	60	Anhydrite
3490	3515	25	Anhydrite & Lime
3515	3565	50	Anhydrite
3565	3580	15	Red Sand
3580	3610	30	Anhydrite
3610	3615	5	Anhydrite & Red Rock
3615	3930	315	Lime
3930	3945	15	Brown Lime (slight show of oil)
3945	4010	65	Lime
4010	4090	80	White Lime
4090	4100	10	Sandy Lime (slight show of oil)
4100	4115	15	White Lime
4115	4147	32	Sandy Lime
4147	4179	32	Sand (oil)
4179	4180	1	White Lime

4180', total depth.

 402 38
 402 38

 402
 38