


N

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

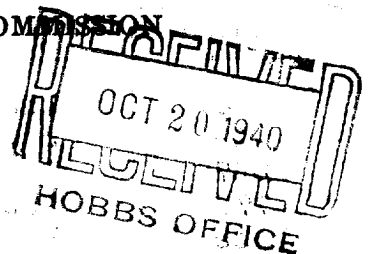

AREA 640 ACRES
LOCATE WELL CORRECTLY

Sears & Thrash

Box 516, Artesia, N. M.

Company or Operator Pearl Miller Well No. 2 NE-1/4 of Sec. 26 T. 17S
 Lease
 R. 22 32E N. M. P. M., Maljamar Field, Lea County.
 Well is 660 feet south of the North line and 1980 feet E of the NE line of Sec. 26, 17, 32
 If State land the oil and gas lease is No. _____ Assignment No. _____
 If patented land the owner is _____ Address _____
 If Government land the permittee is Pearl Miller Address _____
 The Lessee is _____ Address _____
 Drilling commenced 4/18/40 19____ Drilling was completed 6/18/40 19____
 Name of drilling contractor C. C. Dodson Address Artesia, N. M.
 Elevation above sea level at top of casing _____ feet.
 The information given is to be kept confidential until _____ 19____

OIL SANDS OR ZONES

No. 1, from 4028 to 2076 No. 4, from _____ to _____
 No. 2, from _____ to _____ No. 5, from _____ to _____
 No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet.
 No. 2, from _____ to _____ feet.
 No. 3, from _____ to _____ feet.
 No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
<u>8 1/2"</u>	<u>28.7</u>	<u>8</u>		<u>1025'</u>	<u>Plain</u>				
<u>5 3/4"</u>	<u>19.70</u>	<u>10</u>		<u>3553'</u>	<u>"</u>				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>10</u>	<u>8 1/2"</u>	<u>1025'</u>	<u>50</u>	<u>Haliburton</u>	<u>Heavy</u>	<u>Circulated</u>
<u>6</u>	<u>5 3/4"</u>	<u>3553'</u>	<u>100</u>	<u>"</u>	<u>"</u>	<u>"</u>

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
 Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	<u>Tin</u>	<u>Nitro</u>	<u>240 qts.</u>	<u>6/19</u>	<u>4000-80</u>	<u>4080</u>

Results of shooting or chemical treatment After shot, cleaned out to bottom and shut in for pumping unit. Pumped 45 bbls. on 12 hours test.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 3795 feet, and from _____ feet to _____ feet
 Cable tools were used from 3795 feet to 4165 feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing 10/2/40 19____
 The production of the first 2 1/2 hrs was 45 barrels of fluid of which 100 % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be _____
 If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
 Rock pressure, lbs. per sq. in. _____

EMPLOYEES

W. C. Karr Driller Perry Triplett Driller
Glenn Hill Driller _____ Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 18th

day of Oct. 19 40

Notary Public

My Commission expires 2/28/44

Artesia, N. M. 10/12/40
 Name Frank Bellin
 Position Book-keeper
 Representing Sears & Thrash
 Company or Operator
 Address Box 516, Artesia, N. M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	20	20	Surface Sand
20	367	347	Gravel & Red Rock
367	776	409	Red Rock
776	1055	279	Anhydrite
1055	2135	1080	Salt
2135	2980	845	Anhydrite
2980	3078	98	Lime & Anhydrite
3078	3710	632	Lime
3710	3726	16	Saturated Lime
3726	3745	19	Lime
3745	3779	34	Saturated Lime
3779	3919	140	Lime
3919	3925	6	Sandy Lime
3925	4018	93	Lime
4018	4028	10	Soft Lime
4028	4042	14	Sandy Lime
4042	4065	23	Lime
4065	4076	11	Sandy Lime
4076	4165	89	Lime