


DUPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION  
SANTA FE, NEW MEXICO

MISCELLANEOUS NOTICES

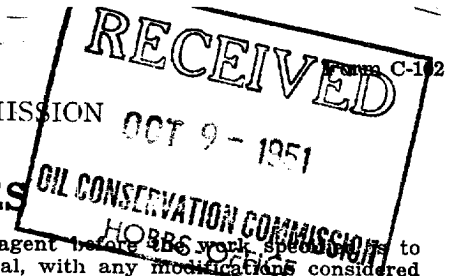

Submit this notice in triplicate to the Oil Conservation Commission or its proper agent before any work is begun to begin. A copy will be returned to the sender on which will be given the approval, with any modifications considered advisable, or the rejection by the Commission or agent, of the plan submitted. The plan as approved should be followed, and work should not begin until approval is obtained. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of notice by checking below:

NOTICE OF INTENTION TO TEST CASING SHUT-OFF	<input checked="" type="checkbox"/>	NOTICE OF INTENTION TO SHOOT OR CHEMICALLY TREAT WELL	
NOTICE OF INTENTION TO CHANGE PLANS		NOTICE OF INTENTION TO PULL OR OTHERWISE ALTER CASING	
NOTICE OF INTENTION TO REPAIR WELL		NOTICE OF INTENTION TO PLUG WELL	
NOTICE OF INTENTION TO DEEPEN WELL			

Monument, New Mexico

October 1, 1951

Place

Date

OIL CONSERVATION COMMISSION,  
Santa Fe, New Mexico

Gentlemen:

Following is a notice of intention to do certain work as described below at the

**Amerada Petroleum Corporation** State **3** **W** Well No. **7** in **NW/4 NW/4**  
Company or Operator **15-S** Lease **33-E** **Saunders**  
of Sec. **3**, T. **15-S**, R. **33-E**, N. M. P. M., **Lea** Field.  
County.

FULL DETAILS OF PROPOSED PLAN OF WORK

FOLLOW INSTRUCTIONS IN THE RULES AND REGULATIONS OF THE COMMISSION  
**10010' - Total Depth - Lime. Finished drilling 7-7/8" hole @ 12:45 PM, 9/28/51**  
**Ran Schlumberger's Electrical, Gamma Ray & Microlog Surveys. Ran 290 Jts**  
**of 5 1/2" casing as follows:**

40 Jts 5 1/2" OD 17# N-80 R-3 SS Csg. New	1621.63'
68 Jts 5 1/2" OD 17# J-55 R-2 8-RT Italian Csg. New	1953.64'
89 Jts of 5 1/2" OD 15.5# J-55 8-RT SS Csg. New	3501.70'
69 Jts 5 1/2" OD 17# J-55 R-2 8-RT Italian Csg New	2012.75'
24 Jts 5 1/2" OD 17# N-80 R-3 8-RT SS Csg. New	906.46'
	<b>9996.18'</b>

Casing set at 10010' with 600 sax slo-set cement mixed with 3% Jel & 1/4" Flo-seal per sack. Ran 7 Baker Centralizers spaced 30' apart from 9995' to 9815' and 14 Weatherford Scratchers spaced 15' apart in above section. After W.O.C. for approximately 24 hours we will test Casing shut-off.

Approved 10-9, 19 51  
except at follows:

**Amerada Petroleum Corporation**

Company or Operator

By D. W. Tupper  
Position **Assistant District Superintendent**  
Send communications regarding well to  
**Amerada Petroleum Corporation**  
Name  
Address **Drawer B, Monument, New Mexico**

OIL CONSERVATION COMMISSION,

By R. A. Blum

Title Engineer