


OIL CONSERVATION COMMISSION

SANTA FE, NEW MEXICO

Miscellaneous Reports on Wells

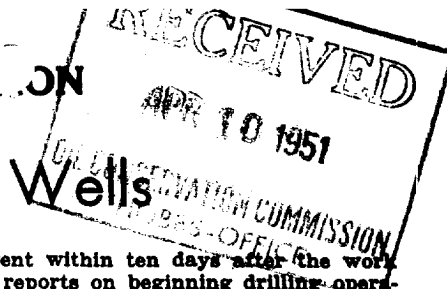

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below.

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON REPAIRING WELL	
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL		REPORT ON PULLING OR OTHERWISE ALTERING CASING	
REPORT ON RESULT OF TEST OF CASING SHUT-OFF		REPORT ON DEEPENING WELL	
REPORT ON RESULT OF PLUGGING OF WELL		REPORT ON SETTING CASING	X

April 6, 1951

Monument, New Mexico

Date

Place

OIL CONSERVATION COMMISSION,
SANTA FE, NEW MEXICO.
Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the
Amerada Petroleum Corporation State **8 "C"** Well No. **1** in the
Company or Operator Lease
C/NE/4 NE/4 of Sec. **3**, T. **15-S**, R. **33-E**, N. M. P. M.,
Saunders Field **Lea** County.

The dates of this work were as follows: **April 6, 1951**
Notice of intention to do the work was ~~submitted~~ submitted on Form C-102 on **April 5,** 19**51**
and approval of the proposed plan was ~~obtained~~ obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

9933' - Total Depth - Line. Ran Schlumberger's Electrical, Gamma Ray & Microlog Surveys. Ran 250 Jts., 9915.50', 5-1/2" O.D., 17#, S.S. New Casing - Set at 9933' & cemented with 600 sacks Trinity Infurne Slow-Set cement, mixed W/3% Jell & 1/4# Flow-Seal per sack. Plug to 9842' at 5:15 A.M., 4-6-51. Maximum pump pressure 1200#. Ran 7 Baker Centralizers, spaced 30' apart, from 9740' to 9920' and 22 Weatherford Wall Scratchers, spaced 10' apart, in above section.

Witnessed by **C. E. Telge** **Amerada Petroleum Corporation** **Foreman**
Name Company Title

Subscribed and sworn before me this.....

I hereby swear or affirm that the information given above is true and correct.

6th day of **April**, 19**51**

Name **Dw. Tapp**

Position **Assistant District Superintendent**

Representing **Amerada Petroleum Corporation**
Company or Operator

My commission expires **10-11-54**

Address **Drawer D, Monument, New Mexico**

Remarks:

APPROVED

APR 10 1951

Date

Ray Yarkbrough
Oil & Gas Inspector

Title

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...

...the ... of ...
...the ... of ...
...the ... of ...

...the ... of ...

...the ... of ...

...the ... of ...