


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

MISCELLANEOUS REPORTS ON WELLS

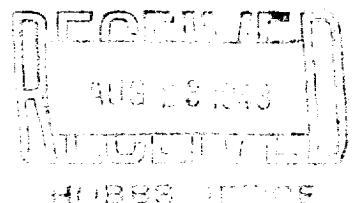

Submit this report in triplicate to the Oil Conservation Commission or its proper agent within ten days after the work specified is completed. It should be signed and sworn to before a notary public for reports on beginning drilling operations, results of shooting well, results of test of casing shut-off, result of plugging of well, and other important operations, even though the work was witnessed by an agent of the Commission. Reports on minor operations need not be signed and sworn to before a notary public. See additional instructions in the Rules and Regulations of the Commission.

Indicate nature of report by checking below:

REPORT ON BEGINNING DRILLING OPERATIONS	REPORT ON REPAIRING WELL
REPORT ON RESULT OF SHOOTING OR CHEMICAL TREATMENT OF WELL	REPORT ON PULLING OR OTHERWISE ALTERING CASING
REPORT ON RESULT OF TEST OF CASING SHUT-OFF	REPORT ON DEEPENING WELL
REPORT ON RESULT OF PLUGGING OF WELL X	

Lobbs, New Mexico Place

August 23, 1943 Date

OIL CONSERVATION COMMISSION,
SANTA FE, NEW MEXICO.

Gentlemen:

Following is a report on the work done and the results obtained under the heading noted above at the

Neville G. Penrose, Inc. Phillips State Well No. 1 in the
Company or Operator Lease
C-SE¹/₄ SE¹/₄ of Sec. 3, T. 13S, R. 33E, N. M. P. M.,
Wildcat Field, Lea County.

The dates of this work were as follows: August 7, 8, 9, 1943

Notice of intention to do the work was (was not) submitted on Form C-102 on August 7 1943
and approval of the proposed plan was ~~(was not)~~ obtained. (Cross out incorrect words.)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

The 5 $\frac{1}{2}$ " casing was shot off at 4170' and pulled. Abridge was set at 2575' and 10 sacks of cement pumped on top by Halliburton. Mud was left in the hole above the cement plug and another plug bridge was set at 1628'. Ten sacks of cement were pumped in on top of the bridge and returned to depth of 1595'. The 8-5/8" casing which had been cemented both from the bottom and top was left in the hole and was filled to top with mud. A wood plug was driven in the casing to a point 30' from top and casing was filled to top with cement. A four inch marker was welded in top of casing and permitted to extend 4' above ground. Circulating pits have been filled and levelling on reserve pits will continue as soon as mud dries out and permits working.

Witnessed by Tom Marks Name Neville G. Penrose, Inc. Supt.
Company Title

Subscribed and sworn before me this 23

day of Aug, 1943

Patricia Mahoney Notary Public

My commission expires 10-24-43

I hereby swear or affirm that the information given above is true and correct.

Name R. Miller

Position Agent

Representing Neville G. Penrose, Inc.
Company or Operator

Address Fair Bldg., Ft. Worth, Texas.

Remarks:

Roy Yarbrough
Name
Title