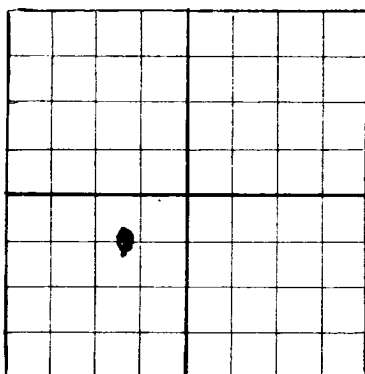



N

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN-TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

C. M. Pearce, 1201 Jones St., Fort Worth, Texas

Company or Operator

Address

State

Well No. 1

NE 1/4 SW 1/4

of Sec. 31

T. 16S

Lease

R. 33E

N. M. P. M. Wildcat

Field, Lea

County.

Well is 3300 feet south of the North line and 3300 feet west of the East line of Section 31

If State land the oil and gas lease is No. 4284 Assignment No. 1

If patented land the owner is X Address

If Government land the permittee is X Address

The Lessee is Cities Service Oil Co. Address Houston, Texas

Drilling commenced March 10 1945 Drilling was completed April 20 1945

Name of drilling contractor Apex Drilling Co. Address 1201 Jones, Ft. Worth, Tex.

Elevation above sea level at top of casing 4238 feet.

The information given is to be kept confidential until May 2 1945

OIL SANDS OR ZONES

No. 1, from 2840 to 2860	No. 4, from 4350 to 4380
No. 2, from 4100 to 4120	No. 5, from 4450 to 4470
No. 3, from 4200 to 4220	No. 6, from 4540 to 4570

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to	feet.
No. 2, from to	feet.
No. 3, from to	feet.
No. 4, from to	feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADED PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8 5/8	32	10		1202	Float				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/2	8 5/8	1202	500	Halliburton	Cemented to	surface

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set

Adapters—Material Size

Halliburton Plug 7-5/8 inch set 2700 feet

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		None				

Results of shooting or chemical treatment
None

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from feet to feet, and from feet to feet

Cable tools were used from 0 feet to 4575 feet, and from feet to feet

PRODUCTION

Put to producing 19

The production of the first 24 hours was barrels of fluid of which % was oil; % emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

Arlie Williams Driller J. M. Roberts Driller

A. J. Holland Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 15th

day of February 19 46

Ft. Worth, Texas Feb. 15, 1946

Name

Position

FORMATION

[illegible]