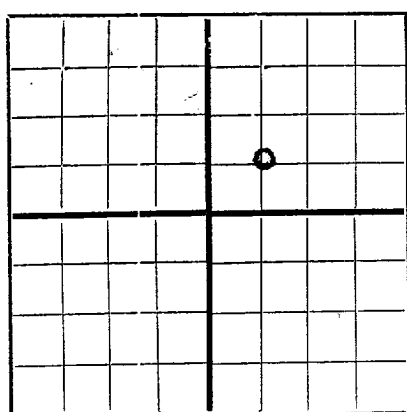


N

AREA 640 ACRES
LOCATE WELL CORRECTLYNEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

C. T. McLaughlin **Diamond M Building, Snyder, Texas**
Company or Operator Address
State "C" Well No. 1 in SW/4 NE/4 of Sec. 7, T. 17-S
Lease
R. 33-E, N. M. P. M. Roberts Field, Lea County.
Well is 1980 feet south of the North line and 1980 feet west of the East line of Sec. 7, 17-S, 33-E.
If State land the oil and gas lease is No. B-1565 Assignment No.
If patented land the owner is, Address.
If Government land the permittee is, Address.
The Lessee is C. T. McLaughlin, Address Snyder, Texas
Drilling commenced June 18, 1950 Drilling was completed August 31, 1950
Name of drilling contractor Kincaid & Watson Drlg. Co., Address Artesia, New Mexico
Elevation above sea level at top of casing 4226 feet.
The information given is to be kept confidential until Release immediately 19.

OIL SANDS OR ZONES

No. 1, from 4202 to 4207 No. 4, from to
No. 2, from 4328 to 4341 No. 5, from to
No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 100 to 130 feet.
No. 2, from 1270 to 1282 feet.
No. 3, from 1390 to 1397 feet.
No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
8-5/8"	284	8-Rnd	Rep.	1415	Float				Water shut-off Oil String
5-1/2"	15.54	10-Y	Rep.	4108	Float				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
11"	8-5/8"	1415'	100	Halliburton		
8"	5-1/2"	4108'	100	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters — Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
4-3/4"	4"	S. N. G.	50	9-1-50	4210-30	
4-3/4"	4"	S. N. G.	80	8-31-50	4327-58	4385'

Results of shooting or chemical treatment Increase in oil and gas. Swabbed 20-bbls/day

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 1409 feet, and from feet to feet
Cable tools were used from 1409 feet to 4490 feet, and from feet to feet

PRODUCTION

Put to producing September 11, 1950.
The production of the first 24 hours was 15-bbls. barrels of fluid of which 95% was oil; %
emulsion; 5% water; and % sediment. Gravity, Be. 34.142
If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas
Rock pressure, lbs. per sq. in.

EMPLOYEES

McDorman, Driller Floyd Davis, Driller
, Driller Earl Howell, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 25th

day of May, 1953

L. Caruthers
Snyder, Texas
Notary Public

My Commission expires June 1, 1953

Snyder, Texas, May 25, 1953

Name James L. Kincaid

Position Superintendent

Representing C. T. McLaughlin
Company or Operator

Address Snyder, Texas

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	50	50	Caliche
50	100	50	Sand and Gravel
100	130	30	Water Sand
130	1235	1105	Sand and Red Shale
1235	1270	35	Anhydrite
1270	1282	12	Water Sand
1282	1390	108	Anhydrite and red shale
1390	1397	7	Water sand
1397	1415	18	Anhydrite 8-5/8" @ 1415'
1415	1940	525	Anhydrite and salt
1940	2290	350	Salt and potash
2290	2450	160	Salt and anhydrite
2450	4000	1550	Anhydrite and red shale
4000	4055	55	Anhydrite and grey lime
4055	4065	10	Grey lime
4065	4071	6	Bentonite
4071	4202	131	Grey lime 5-1/2" @ 4108
4202	4207	5	Sand. Show of oil.
4207	4328	121	Grey lime
4328	4341	13	Grey lime. Show of oil
4341	4362	21	Grey lime
4362	4490	128	White lime. Top San Andres @ 4362'
	T. D.		
			Shot w/50 qts. SNG 4210-30'
			Shot w/80 qts. SNG 4327-50'
			Cleaned out to 4385'