


COPY TO
HOBBS

Land Office **New Mexico**

Lease No. **16-069053**

Unit

RECEIVED
OCT 2 1958
U. S. GEOLOGICAL SURVEY
HOBBS NEW MEXICO

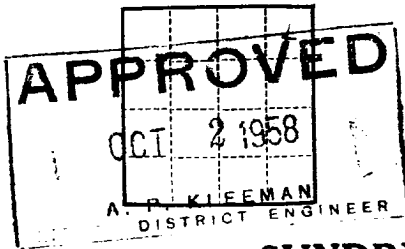

(SUBMIT IN TRIPPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY
NOTICE OF INTENTION TO ABANDON WELL	
Notice of Intention to re-enter	<i>Standard well</i>

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

October 1, 19 **58**

Well No. **1** is located **660** ft. from **[N]** line and **660** ft. from **[E]** line of sec. **1**
1 **1** **16S** **74E** **N.M.P.M.**
 (1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Wildcat **16a** **New Mexico**
 (Field) (County or Subdivision) (State or Territory)

The elevation of the **ground level** above sea level is **4066** ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

We intend to re-enter this well and test a zone between 11,270' and 11,340' which showed to be a possible producing zone on drillstem test but was not perforated and tested after casing was run. The procedure which we intend to follow is to set a bridge plug at 11,400' and perforate above and below the zone for purposes of block squeezing prior to the testing of the zone. The zone will then be perforated with two shots per foot washed with a 1,000 gals. of mud-acid and scrubbed tested. Further treatment of this section will be governed by the results obtained following this treatment. Our plans relative to the block squeeze is to perforate a four foot section approximately ten feet above and ten feet below the zone and squeeze each section with approximately 500 gals. of Russell cement.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company **KLEINF, INC.**

Address **Box 5669**

Roswell, New Mexico

By *[Signature]*

Title **Vice-President**

