


DEVON ENERGY CORPORATION WELLBORE SCHEMATIC

WELL NAME: Daisy Chambers #1			FIELD: Townsend (Permo Upper Penn)			
LOCATION: Section 26, T15S, R35E			COUNTY: Lea			STATE: NM
ELEVATION: GL=3956' - KB=3974'			SPUD DATE: 7/19/55		COMP DATE: 11/30/55	
API # 30-025-02696		PREPARED BY: W. M. Frank				DATE: 10/25/99
TUBULARS	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 369'	13 3/8"	48	H-40	ST&C	17 1/2"
CASING:	0' - 4734'	9 5/8"	36	J-55	ST&C	12 1/4"
CASING:	0' - 10705'	5 1/2"	17 & 15.5	N-80 & J-55	LT&C	8 3/4"
OPEN HOLE:	10,705' - 14,015'					8 3/4"
TUBULARS						



CURRENT

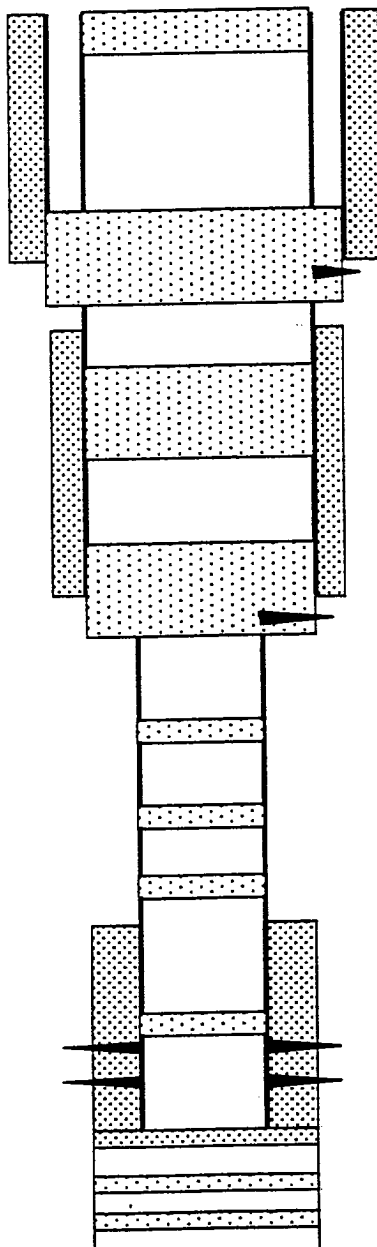

PROPOSED

10 sxs Surface plug from 60' up.

13 3/8" Csg, Cmt'd w/450 sxs. Circ. 80 sxs to surface.

35 sxs Surface shoe plug from 419' up inside and out.

35 sxs salt zone plug from 2,050' up inside and out.

9 5/8" Casing cmt'd w/3,000 sxs. TOC f/ Temp. Survey @ 460'
35 sxs Intermediate shoe plug from 4,784' up inside and out.

25 sxs Glorieta plug f/6,345' up.

25 sxs "H" cement plug from hole in casing at 6,700' up.

25 sxs "H" cement plug from 7,000' up.

25 sxs "H" cement plug from 10,000' up.

Wolfcamp Perfs f/10004 - 08, 56 - 66', 180 - 198', 354 - 359' (4 spf).

Wolfcamp Perfs f/10581 - 606' (4 spf).

PBTD @ 10633'

5 1/2" @ 10705'. Csg cmt'd w/550 sxs cmt. TOC via Temp Svy @ 8662'.

Cmt plugs @ 14009 - 13812' and 11006 - 10820'.

TD @ 14015'