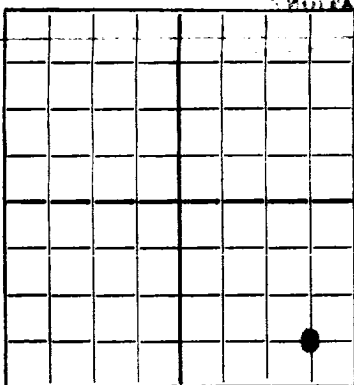


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

AREA 640 ACRES
LOCATE WELL CORRECTLY

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

C.L. CARLOCK

Quincy Ricker Natl. Bank

Company or Operator

Well No. 1

in SESE

of Sec. 7

T. 16

R. 36

N. M. P. M.,

Lovington

Field,

Lea

County,

Well is 4620 feet south of the North line and 660 feet west of the East line of Sec. 7; T 16; R 36

If State land the oil and gas lease is No.

Assignment No.

If patented land the owner is Quincy Ricker Natl. Bank

Address Receiver at Washington, D.C.

If Government land the permittee is

Address

The Lessee is

Address

Drilling commenced Sept. 8

19 36

Drilling was completed February 11

19 37

Name of drilling contractor Stovall & Love Drilling Co.

Address Carlsbad, New Mexico

Elevation above sea level at top of casing 3945 feet.

The information given is to be kept confidential until

19

OIL SANDS OR ZONES

No. 1, from to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 80 to 110 feet. Rose Approx. 60 ft.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM TO	PURPOSE
15 1/2	70	10	Smls	229'	Standard			
10 3/4	42	8	"	2007'	Floating			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
19 1/2	15 1/2	229'	150	Halliburton		
13 3/4	10-3/4	2007'	300	"		

PLUGS AND ADAPTERS

Heaving plug—Material Length Depth Set
Adapters—Material Size

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT

Results of shooting or chemical treatment

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 2007 feet, and from feet to feet

Cable toops were used from 2007 feet to 5501 feet, and from feet to feet

PRODUCTION

Put to producing 19

The production of the first 24 hours was barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

EMPLOYEES

W.K. DuBois

Driller

S.M. Kemp

Driller

H.O. Stovall

Driller

S.F. Tennant

Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 12th

Carlsbad, N.M. February 12, 1937

day of February, 19 37

Name

Agent

Position

Representing

C.L. Carlock

Notary Public

My Commission expires Sept. 8, 1938

Address

500 Ellis Singleton Bldg.

Wichita, Kansas

FORMATION RECORD

B-20 1201

FROM	TO	THICKNESS IN FEET	FORMATION
0	40	40	Caliche
40	80	40	Red Bed
80	110	30	Sand (water)
110	215	105	Gravel
215	293	78	Red Bed
293	1309	1016	Red rock & Red bed
1309	1375	66	Sand lime
1375	1830	455	Red rock shells
1830	1975	145	Sandy lime
1975	1975	0	Top of Anhydrite
1975	2095	120	Anhydrite
2095	2095	0	Top of Salt
2095	2985	890	Salt
2985	2985	---	Base of salt
2985	3013	28	Lime anhydrite
3013	3475	462	Anhydrite red rock
3475	3540	65	Grey lime
3540	4040	500	Anhydrite
4040	4100	60	Lime
4100	4117	17	Sandy lime
4117	4364	57	Lime
4364	4382	18	Anhydrite red rock
4382	4429	47	Lime
4429	5501	1072	Lime
			T.D. S.L.M.