

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

Notice of Intention to Drill

DUPLICATE

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, New Mexico

Nov. 20, 1939

Place


Date

OIL CONSERVATION COMMISSION, Santa Fe, New Mexico. Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as SKELLY OIL CO. State "R" Well No. 2 in CME NW

of Sec. 36, T. 18, R. 36, N. M. P. M. S. Lovington Field, Lea County

The well is 1980 feet (N.) (S.) of the North line and 1980 feet (E.) (W.) of the West line of Section 36 -

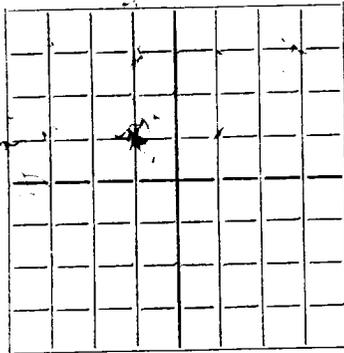

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. ? Assignment No.

If patented land the owner is

Address

If government land the permittee is

Address

The lessee is Skelly Oil Co.

Address Tulsa, Oklahoma

RECEIVED NOV 20 1939 HOBB'S OFFICE

We propose to drill well with drilling equipment as follows:

Rotary tools top to bottom. Contractor Lee Drilling Co., Tulsa, Oklahoma

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows:

We propose to use the following strings of casing and to land or cement them as indicated:

Table with 7 columns: Size of Hole, Size of Casing, Weight Per Foot, New or Second Hand, Depth, Landed or Cemented, Sacks Cement. Rows include 15" casing (20' depth, cemented), 10 1/2" casing (2100' depth, cemented), and 6-1/4" casing (4520' depth, cemented).

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 4600 feet.

Additional information: The 13" casing will be set at approxi. 20' and used for conductor pipe. In cementing the 8-5/8" DD casing the cement will be circulated back into the bottom of the cellar.

Approved NOV 20 1939, 19... except as follows:

Sincerely yours,

SKELLY OIL COMPANY

By J. T. Ramsey, District Supt.

Position

Send communication regarding well to

Name Skelly Oil Co.

Address Hobbs, New Mexico

OIL CONSERVATION COMMISSION,

By Roy Garbarough, OIL & GAS INSPECTOR