

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

NOTICE OF INTENTION TO DRILL

MAY 17 1945

Notice must be given to the Oil Conservation Commission or its proper agent and approval obtained before drilling begins. If changes in the proposed plan are considered advisable, a copy of this notice showing such changes will be returned to the sender. Submit this notice in triplicate. One copy will be returned following approval. See additional instructions in Rules and Regulations of the Commission.

Hobbs, N. M.

May 14, 1945

PLACE

DATE

OIL CONSERVATION COMMISSION,
Santa Fe, New Mexico,

Gentlemen:

You are hereby notified that it is our intention to commence the drilling of a well to be known as.....

Skelly Oil Company


State "R"

Well No. 3 in CNE/4 SW/4

COMPANY OR OPERATOR

LEASE

of Sec. 36, T. 16S, R. 36E, N. M. P. M., Levington Field, Lea County.

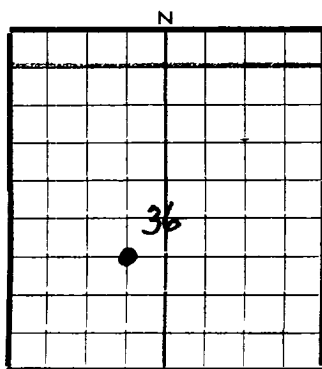

The well is 1980 feet (N.) (~~SW~~ of the South line and 1980 feet (E.) ~~SW~~ of the West line of Sec. 36-16S-36E

(Give location from section or other legal subdivision lines. Cross out wrong directions.)

If state land the oil and gas lease is No. ? Assignment No.

If patented land the owner is

Address

If government land the permittee is

Address

The lessee is Skelly Oil Company

Address Tulsa, Oklahoma

AREA 640 ACRES
LOCATE WELL CORRECTLY

We propose to drill well with drilling equipment as follows: Rotary tools

from top to total depth. Contractor is Coats Drilling Co.

The status of a bond for this well in conformance with Rule 39 of the General Rules and Regulations of the Commission is as follows:

We propose to use the following strings of casing and to land or cement them as indicated:

SIZE OF HOLE	SIZE OF CASING	WEIGHT PER FOOT	NEW OR SECOND HAND	DEPTH	LANDED OR CEMENTED	SACKS CEMENT
15"	13" OD	40#	Conductor	20'	Cemented	20
9-7/8"	7-5/8" OD	18#	New	2100'	Cemented	400
6-1/4"	5-1/2" OD	17#	New	4600'	Cemented	200

If changes in the above plan become advisable we will notify you before cementing or landing casing. We estimate that the first productive oil or gas sand should occur at a depth of about 4600 feet.

Additional information: Approximately 20' of 13" OD Casing to be used as conductor cemented w/20 sacks cement. In cementing all the above casing sufficient time shall be allowed for cement to thoroughly set before drilling plug and testing casing shut-off.

Approved: MAY 17 1945, 19.....
Except as follows:

Sincerely yours,

SKELLY OIL COMPANY

COMPANY OR OPERATOR

By

Position District Superintendent

Send communications regarding well to

Name Skelly Oil Company

Address Drawer "D", Hobbs, N. M.

OIL CONSERVATION COMMISSION,

By

Title