

N.

Orig: & Sec: OCC

ce: VDA

JTR

EGC

WDM


PAD

F

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

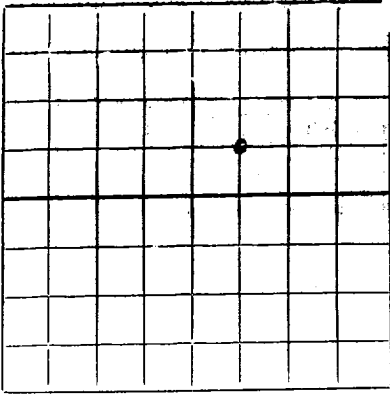

AREA 640 ACRES
LOCATE WELL CORRECTLY

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

Sinclair Oil & Gas Company

(Company or Operator)

Lee Whitman

(Lease)

Well No. 1, in SW 1/4 of NE 1/4, of Sec. 26, T. 14 S, R. 37 E, NMPM.

Denton

Pool,

Lea

County.

Well is 1980 feet from North line and 1980 feet from East line

of Section 26-14S-37E. If State Land the Oil and Gas Lease No. is.....

Drilling Commenced 9-11, 1952 Drilling was Completed 2-16, 1953

Name of Drilling Contractor Tri-Service Drilling Company

Address Midland, Texas

Elevation above sea level at Top of Tubing Head 3812. The information given is to be kept confidential until....., 19.....

OIL SANDS OR ZONES

No. 1, from 12350 to 12415 No. 4, from..... to.....

No. 2, from..... to..... No. 5, from..... to.....

No. 3, from..... to..... No. 6, from..... to.....

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from..... to..... feet.....

No. 2, from..... to..... feet.....

No. 3, from..... to..... feet.....

No. 4, from..... to..... feet.....

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13 3/8	39	N	280	Larkin			
9 5/8	36 & 40	N	4735	"			
7	23, 26, 29, 32	N	12574	"		12350 -12415	Oil
2 1/2	407	N	12380				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17	13 3/8	280	400	Halliburton		
12 1/4	9 5/8	4737	1500	de		
8 3/4	7	12574	750	de		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

None- producing natural

Result of Production Stimulation.....

drilled plug
Depth Cleaned Out 1212/89 12489

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from Surface feet to 12575 feet, and from _____ feet to _____ feet.
 Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.

PRODUCTION

Put to Producing February 18, 1953

OIL WELL: The production during the first ~~24~~ hours was 957 barrels of liquid of which 100 % was oil; _____ % was emulsion; _____ % water; and _____ % was sediment. A.P.I. Gravity 46.5

GAS WELL: The production during the first 24 hours was _____ M.C.F. plus _____ barrels of liquid Hydrocarbon. Shut in Pressure _____ lbs.

Length of Time Shut in _____

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico		Northwestern New Mexico	
T. Anhy.....	<u>2160</u>	T. Devonian.....	<u>12220</u>
T. Salt.....	<u>2260</u>	T. Silurian.....	
B. Salt.....	<u>3005</u>	T. Montoya.....	
T. Yates.....		T. Simpson.....	
T. 7 Rivers.....		T. McKee.....	
T. Queen.....		T. Ellenburger.....	
T. Grayburg.....		T. Gr. Wash.....	
T. San Andres.....	<u>4620</u>	T. Granite.....	
T. Glorieta.....	<u>5140</u>	T.	
T. Drinkard.....		T.	
T. Tubbs.....	<u>7295</u>	T.	
T. Abo.....	<u>7990</u>	T.	
T. Penn. C.....	<u>9310</u>	T.	
T. Miss.....		T.	
		T. Ojo Alamo.....	
		T. Kirtland-Fruitland.....	
		T. Farmington.....	
		T. Pictured Cliffs.....	
		T. Menefee.....	
		T. Point Lookout.....	
		T. Mancos.....	
		T. Dakota.....	
		T. Morrison.....	
		T. Penn.....	
		T.	
		T.	

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	45	45	Caliche	9849	11221	1372	Lime, shale & chert
45	110	65	Caliche & sand	11221	11258	37	Black shale
110	341	231	Redbed	11258	11436	178	Lime & shale
341	1418	1077	Redbed, shells & sand	11436	11644	208	Lime, shale & chert
1418	1671	253	Redbed & Anhydrite	11644	11951	307	Lime & shale
1671	1860	189	Redbed & blue shale	11951	11977	26	Lime, shale & chert
1860	2043	183	Redbed & Anhydrite	11977	11987	10	Lime & shale
2043	2461	418	Anhydrite & Gyp	11987	12029	42	Lime & chert
2461	3888	1427	Anhydrite & salt	12029	12134	105	Lime & shale
3888	4041	153	Anhydrite & Gyp	12134	12151	17	Shale
4041	4648	607	Anhydrite & lime	12151	12232	81	Lime & shale
4648	4690	42	Anhy., lime & Dolomite	12232	12274	42	Lime & Dolomite
4690	4792	102	Anhydrite & lime	12274	12575	301	Lime
4792	6396	1604	Lime				
6396	7112	716	Lime & Dolomite				
7112	7293	181	Dolomite				
7293	7352	59	Dolomite & shale				
7352	7417	65	Dolomite & sand				
7417	7451	34	Dolomite				
7451	7487	36	Dolomite & sand				
7487	8080	593	Dolomite				
8080	8128	48	Lime & shale				
8128	8396	268	Dolomite				
8396	8463	67	Dolomite & sand				
8463	9321	858	Dolomite & lime				
9321	9849	528	Lime				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

February 23, 1953 (Date)

Company or Operator Sinclair Oil & Gas Company Address Box 1927 Hobbs, New Mexico
 Name O. C. Salter Position or Title List. Supt.