

Orig: & cc: OGC

cc: VDA

JTR


F

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

DUPLICATE

MISCELLANEOUS REPORTS ON WELLS

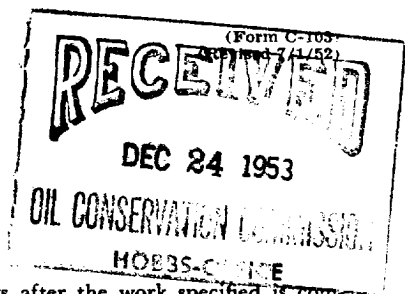

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<input checked="" type="checkbox"/>	REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)	

December 23, 1953

(Date)

Hobbs, New Mexico

(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Sinclair Oil & Gas Company

(Company or Operator)

Lee Whitman

(Lease)

Carl B. King Drilling Co.

(Contractor)

Well No. 4 in the SE 1/4 NE 1/4 of Sec. 26

T. 14-S, R. 37-E, NMPM, Denton Pool, Lea County.

The Dates of this work were as follows: 12-8-53

Notice of intention to do the work (~~work~~ (was not) submitted on Form C-102 on _____, 19_____,
(Cross out incorrect words)

and approval of the proposed plan (was) (was not) obtained.

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

Td 12648 - Set 7" OD casing @ 12647 and cemented with 600 sacks of cement. Ran temperature survey which indicated cement behind 7" casing @ 8600'. Let cement set 72 hours and drilled cement plug to 12645. Tested casing with 1000# pump pressure for 30 minutes. No decrease in pressure. Perforated 7" casing W/4 Jet shots per foot from 12540 to 12645. Ran 12640' of 2" UE tubing and swabbed well in. Flowed natural 62 barrels of new oil in 4 hours. Acidized W/3500 gallons, 500 Mud acid and 3000 15% Reg.), W/injection rate of 3.36 Barrels per minute under 2500# pressure. Swabbed well in. Flowed at rate of 895 Barrels of oil in 24 hours.

Witnessed by H. W. Shaner
(Name)

Sinclair Oil & Gas Co.
(Company)

Foreman
(Title)

Approved: _____
OIL CONSERVATION COMMISSION

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name G. G. Little

Position Dist. Supt.

Representing Sinclair Oil & Gas Company

Address Box 1927 Hobbs, New Mexico

S. J. Stanley
(Name)

Engineer District
(Title)

DEC 24 1953

(Date)