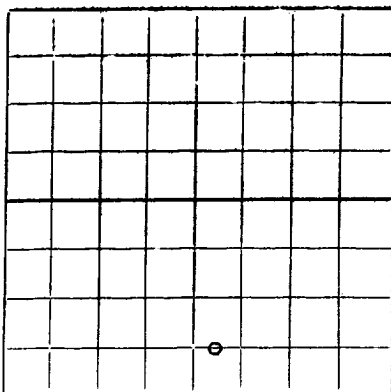


N.


(Revised 7/1/53)
(Form C-105)AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

DUPLICATE

WELL RECORD

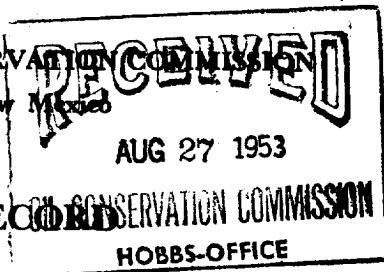

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPPLICATE.

Sinclair Oil & Gas Company

(Company or Operator)

W. T. Mann

(Lease)

Well No. 1, in SW $\frac{1}{4}$ of SE $\frac{1}{4}$, of Sec. 36, T. 14S, R. 37E, NMPM.Denton

Pool,

Lea

County.

Well is 660' feet from South line and 2310' feet from East line of Section 36. If State Land the Oil and Gas Lease No. is _____Drilling Commenced 4/6/53, 19____. Drilling was Completed 7/26/53, 19____.Name of Drilling Contractor Warren & BradshawAddress Tulsa, OklahomaElevation above sea level at Top of Tubing Head 3797'. The information given is to be kept confidential until _____, 19____.

OIL SANDS OR ZONES

No. 1, from 12506 to 12647 No. 4, from _____ to _____

No. 2, from _____ to _____ No. 5, from _____ to _____

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from None to _____ feet.

No. 2, from _____ to _____ feet.

No. 3, from _____ to _____ feet.

No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13 3/8	48	New	302				
9 5/8	36	"	4797	Larkin			
7"	23	"	12646	"			
2 7/8	6.5	"	12631				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/4	13 3/8	305	325	Halliburton		
12 1/2	9 5/8	4799	2200	"		
8 3/4	7	12646	550	"		
8 3/4	2 7/8	12631				

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Acidized W/1,000 Gal. of Mud acid, 3,000 Gal. of 15% Unisol, 8,000 Gal. of Dowell ISMResult of Production Stimulation After 1,000 Gal. treatment flowed 184 Bbl. in 6 Hrs., After 3,000 Gal. treatment flowed 725 Bbl. in 24 Hrs., After 8,000 Gal. treatment flowed 153 Bbl. in 4 Hrs.

Depth Cleaned Out _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from Surface feet to 12647 feet, and from _____ feet to _____ feet.
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.

PRODUCTION

Put to Producing August 4, 1953

OIL WELL: The production during the first 24 hours was 1638 BOPD barrels of liquid of which 100 % was
was oil; _____ % was emulsion; _____ % water; and _____ % was sediment. A.P.I.
Gravity 45

GAS WELL: The production during the first 24 hours was _____ M.C.F. plus _____ barrels of
liquid Hydrocarbon. Shut in Pressure _____ lbs.

Length of Time Shut in _____

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

T. Anhy _____
T. Salt _____
B. Salt _____
T. Yates _____
T. 7 Rivers _____
T. Queen _____
T. Grayburg _____
T. San Andres _____
T. Glorieta _____
T. Drinkard _____
T. Tubbs 7393
T. Abo 8100
T. Permian 9300
T. Miss 11625

Northwestern New Mexico

T. Devonian 12506
T. Silurian _____
T. Montoya _____
T. Simpson _____
T. McKee _____
T. Ellenburger _____
T. Gr. Wash _____
T. Granite _____
T. _____
T. _____
T. _____
T. _____
T. _____
T. _____
T. _____
T. _____
T. _____
T. _____
T. _____
T. _____

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	1121	1121	Rock & Sand				
1121	2190	769	Redrock & Anhydrite				
2190	2235	45	Anhydrite				
2235	3275	1040	Salt & Anhydrite				
3275	3888	613	Anhydrite				
3888	4383	495	Anhydrite & Shale				
4383	4710	327	Lime & Gyp				
4710	5263	553	Lime				
5263	6300	1037	Sand & Lime				
6300	8651	2351	Lime & Shale				
8651	9507	856	Lime				
9507	10361	854	Lime & Shale				
10361	10948	587	Lime				
10948	10985	37	Sand & Lime				
10985	11001	16	Lime & Shale				
11001	11236	235	Lime, Sand, & Shale				
11236	11537	301	Lime				
11537	11656	119	Lime & Shale				
11656	12350	694	Lime				
12350	12371	21	Lime & Shale				
12371	12515	144	Shale				
12515	12647	132	Lime (Total Depth)				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far
as can be determined from available records.

Company or Operator Sinclair Oil & Gas Company Address Box 1927, Hobbs, New Mexico
Name W. C. [Signature] Position or Title Dist. Supt.
August 27, 1953 (Date)