


Orig: & cc: OCC  
cc: VDA  
JTR

NEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

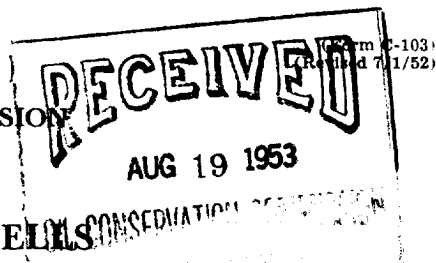

MISCELLANEOUS REPORTS ON WELLS

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<input checked="" type="checkbox"/>	REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION		REPORT ON (Other)	

August 18, 1953

(Date)

Hobbs, New Mexico

(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Sinclair Oil & Gas Company

(Company or Operator)

T. D. Pepe

(Lease)

Warren-Bradshaw Exploration Corp.

(Contractor)

Well No. 3 in the SW 1/4 SW 1/4 of Sec. 36

T. 14 S, R. 37 E, NMPM, Denton Pool, Lea County.

The Dates of this work were as follows: 7-28-53, 8-1-53, 8-4-53, 8-6-53,

Notice of intention to do the work (yes) (was not) submitted on Form C-102 on \_\_\_\_\_, 19\_\_\_\_, (Cross out incorrect words)

and approval of the proposed plan (was) (was not) obtained.

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

- TD 9330 - Spotted 30 sack cement plug @ 9330 and plugged back to 9250  
Let set 72 hours and tool Drill Stem Test 9180 to 9314.  
Set 5 1/2" OD casing @ 9313 and cemented with 200 sacks of cement. Let set 72 hours and drilled cement plug to 9289 and tested with 750# pump pressure for 30 minutes. No decrease in pump pressure.
- PB 9289 - Perforated 5 1/2" casing from 9185 to 9226 and 9254 to 9274 with 4 Jet shots per foot. Acidized w/1,000 Gal. of Mud acid. Swabbed 27 Bbl. of new oil.  
Acidized w/6,000 Gal. (2,000 Gal. of Channel and 4,000 Gal. of XM-38) Swabbed 37 Bbl. of new oil.  
Ran 1,000 Gal. of Jell block and acidized with 5,000 Gal. of 15% Reg. acid. Swabbed in 24 hours, 241 Bbl. of new oil.  
Acidized w/10,000 Gal. (1500 Gal. Jel-X500, 500 XFM, 1500 Channel, 6500 XFM) Swabbed in 24 hours 283 Bbl. of new oil.

Witnessed by: Robert E. Siversón, Sinclair Oil & Gas Co., Engineer  
(Name) (Company) (Title)

Approved: OIL CONSERVATION COMMISSION

Oil & Gas Inspector

(Title)

AUG 21 1953

(Date)

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name: G. S. Suter

Position: Dist. Supt.

Representing: Sinclair Oil & Gas Co.

Address: Box 1927 Hobbs, N.M.