


Orig: & cc: OCC

cc: VDA

DUPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

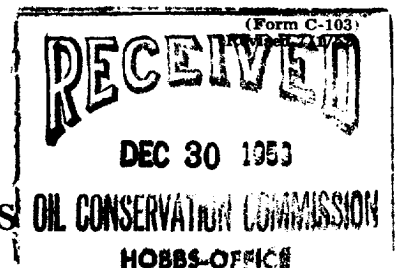

MISCELLANEOUS REPORTS ON WELLS

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF	<input checked="" type="checkbox"/>	REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION	<input checked="" type="checkbox"/>	REPORT ON (Other) ACID	

December 30, 1953

(Date)

Hobbs, New Mexico

(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Sinclair Oil & Gas Company

(Company or Operator)

T. D. Pope

(Lease)

Coroco Drilling Company

(Contractor)

Well No. 4 in the NW 1/4 SW 1/4 of Sec. 36

T. 14 S, R. 37 E, NMPM, Denton Pool, Lea County.

The Dates of this work were as follows: Dec. 13,

Notice of intention to do the work (was) (was not) submitted on Form C-102 on _____, 19____, (Cross out incorrect words)

and approval of the proposed plan (was) (was not) obtained.

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

TD 12642 - Set 7" OD casing @ 12641 and cemented with 700 sacks. Top of cement behind 7" casing @ 8660 F/surface. Let set 72 hours and perforated from 12580 to 12620 and 12525 to 12570 with 4 Jet shots per foot. Swabbed lead water for 62 hours, show of oil and gas. Acidized w/1,000 gallons of mud acid, swabbed lead water for 20 hours. Acidized w/5,000 gallons of 15% regular acid, swabbed lead oil and acid water for 44 hours. Reperforated 7" OD casing from 12298 to 12394 and 12405 to 12444 with 4 jet shots per foot. swabbed lead water for 39 hours and well started to flow. Flowed 422 barrels of new oil in 12 hours.

Witnessed by H. W. Shaner Sinclair Oil & Gas Co. Foreman
(Name) (Company) (Title)

Approved: S. G. Stanley
OIL CONSERVATION COMMISSION
(Name)

Engineer District 1
(Title)

DEC 30 1953
(Date)

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name G. G. Suttie

Position Dist. Supt.

Representing Sinclair Oil & Gas Co.

Address Box 1927 Hobbs, New Mexico