


DUPLICATE

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

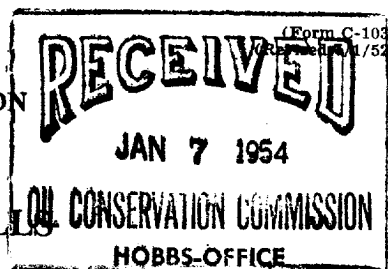

MISCELLANEOUS REPORTS ON WELLS

Submit this report in TRIPLICATE to the District Office, Oil Conservation Commission, within 10 days after the work specified is completed. It should be signed and filed as a report on Beginning Drilling Operations, Results of test of casing shut-off, result of plugging of well, result of well repair, and other important operations, even though the work was witnessed by an agent of the Commission. See additional instructions in the Rules and Regulations of the Commission.

Indicate Nature of Report by Checking Below

REPORT ON BEGINNING DRILLING OPERATIONS		REPORT ON RESULT OF TEST OF CASING SHUT-OFF	X	REPORT ON REPAIRING WELL	
REPORT ON RESULT OF PLUGGING WELL		REPORT ON RECOMPLETION OPERATION		REPORT ON Perforation (Other) and Acidizing	X

January 6, 1954

(Date)

Hobbs, New Mexico

(Place)

Following is a report on the work done and the results obtained under the heading noted above at the

Sinclair Oil & Gas Company

(Company or Operator)

T. D. Pope

(Lease)

Warren-Bradshaw Exploration Corp.

(Contractor)

Well No. 5 in the SW 1/4 NW 1/4 of Sec. 36

T. 14 S, R. 37 E, NMPM, Denton Pool, Lea County.

The Dates of this work were as follows: Dec. 25, 29, 1953. Jan 2, 3, 1954.

Notice of intention to do the work (was not) submitted on Form C-102 on....., 19....., and approval of the proposed plan (was) (was not) obtained.

(Cross out incorrect words)

DETAILED ACCOUNT OF WORK DONE AND RESULTS OBTAINED

TD 12643 - PBD 12640 - Set 7" OD casing @ 12642 and cemented with 700 sacks of cement. Ran temperature survey which indicated cement behind 7" OD casing @ 8585' from surface. Let cement set 72 hours and tested casing with 750# for 30 minutes before and after drilling cement plug. Drilled cement plug to 12640. Perforated 7" OD casing from 12542 to 12639 with 4 jet shots per foot. Ran 12634' of 2 1/2" tubing and swabbed load water for 47 hours. show of oil and gas. Loaded hole with oil and acidised with 1,000 gallons of mud acid. Swabbed for 12 hours. Reloaded hole with oil and acidised with 3,000 gallons of 15% regular acid. Swabbed load oil for 9 hours. Well flowed 752.45 barrels of new oil thru 3/4" choke in 12 hours.

Witnessed by H. W. Shaner
(Name)

Sinclair Oil & Gas Co.
(Company)

Foreman
(Title)

Approved: OIL CONSERVATION COMMISSION

I hereby certify that the information given above is true and complete to the best of my knowledge.

Name: B. B. Satter

Position: Dist. Supt.

Representing: Sinclair Oil & Gas Co.

Address: Box 1 927 Hobbs, New Mexico

Engineer District 1
(Title)

JAN 8 1954
(Date)