

N.


DUPLICATE

2

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

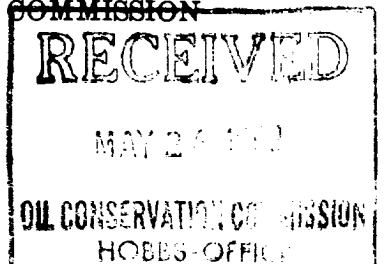

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY

Skelly Oil Company

Mexico "FM"

Company or Operator

Lease

Well No. 5 in NW/4 NE/4 of Sec. 2, T. 15SR. 37E, N. M. P. M., Danton Field, Lea County.Well is 660 feet south of the North line and 1980 feet west of the East line of Section 2If State land the oil and gas lease is No. 7 Assignment No. _____

If patented land the owner is _____, Address _____

If Government land the permittee is _____, Address _____

The Lessee is Skelly Oil Company, Address Tulsa, OklahomaDrilling commenced November 14, 19 51 Drilling was completed May 5, 19 52.Name of drilling contractor Rowan Drilling Company, Address Ft. Worth, TexasElevation above sea level ~~XXXXXXXXXX~~ D.F. 3813 feet.The information given is to be kept confidential until Not Confidential 19 _____

OIL SANDS OR ZONES

No. 1, from 12368 to 12484 No. 4, from _____ to _____

No. 2, from _____ to _____ No. 5, from _____ to _____

No. 3, from _____ to _____ No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ to _____ feet. _____

No. 2, from _____ to _____ feet. _____

No. 3, from _____ to _____ feet. _____

No. 4, from _____ to _____ feet. _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED FROM	TO	PURPOSE
13"	54#	8V		322					
9-5/8"	36#	8R	Nat'l	3929					
9-5/8"	40#	8R	Nat'l	903					
5-1/2"	17#	LT&C	Spang	341					
5-1/2"	17#	L.I.U.	Nat'l	2566					
5-1/2"	17#	LT&C	Nat'l	6488					
5-1/2"	20#	L.I.U.	Nat'l	508					
5-1/2"	20#	LT&C	Spang	2693					

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
18"	13"	331	350	Halliburton		
12-1/4"	9-5/8"	4792	3250	Halliburton		
7-7/8"	5-1/2"	12600	1705	Halliburton		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____

Adapters—Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
		Mud Acid	1000 Gals.		12368-484'	
		15% Reg. Acid	2500 Gals.		12368-484'	

Results of shooting or chemical treatment Well kicked off after swabbing
load oil and acid water.

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from 0 feet to 12,600 feet, and from _____ feet to _____ feet.

Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet.

PRODUCTION

Put to producing May 16, 19 52.The production of the first 24 hours was 1033 barrels of fluid of which 100 % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Bx A.P.I. Corrected 46.2°

If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____

Rock pressure, lbs. per sq. in. _____

EMPLOYEES

W. E. Hooper Driller B. R. Houghton Driller
H. M. Gibbins Driller Ray Moore Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Hobbs, New Mexico May 23, 1952

Name [Signature]Position Dist. Supt.Representing Skelly Oil Company
Company or Operator.Address Box 38 - Hobbs, N.M.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	1497	1497	Red Bed
1497	2120	623	Red Rock
2120	2239	119	Anhydrite
2239	3660	1421	Anhydrite & Salt
3660	4620	960	Anhydrite
4620	4645	25	Anhydrite & Lime
4645	5855	1210	Lime
5855	6132	277	Lime & Sand
6132	11060	4928	Lime
11060	11087	27	Chert
11087	11522	435	Lime & Chert
11522	11723	201	Lime
11723	11882	159	Lime & Shale
11882	12089	207	Lime
12089	12600	511	Lime & Shale
Total Depth - 12600'			