


N.

(Revised 7/1/52)  
(Form C-105)

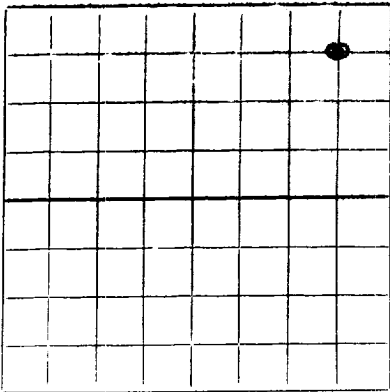

AREA 640 ACRES  
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

MODES OFFICE OCC

1954 APR 6 PM 2:53  
WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE.

J. Don Hudgens, Inc.  
(Company or Operator)

Webb  
(Lease)

Well No. 1, in NE 1/4 of NE 1/4, of Sec. 20, T. 15S, R. 37E, NMPM.

Wildcat

Pool,

Lea

County.

Well is 660 feet from North line and 660 feet from East line

of Section 20. If State Land the Oil and Gas Lease No. is

Drilling Commenced October 21, 1953 Drilling was Completed March 27, 1954

Name of Drilling Contractor Dixilyn Drilling Company

Address P. O. Box 3427, Odessa, Texas

Elevation above sea level at Top of Tubing Head 3831'. The information given is to be kept confidential until 19

OIL SANDS OR ZONES

No. 1, from None to No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 92' to feet.

No. 2, from 110' to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
13 3/8"	45#	New	Circ.	Tex. Pat.	No		
9 5/8"	36 & 40#	"	4970'	Halliburton	945'		
				Guide Shoe			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
18"	13 3/8"	320'	Circ.	Halliburton Plug	Cement 16#	
12 1/2"	9 5/8"	4970'	1100 Sx	"	Cement 15 1/2#	

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Result of Production Stimulation

Depth Cleaned Out

B ORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 320 feet to 13,505 feet, and from feet to feet.  
Cable tools were used from 0 feet to 320 feet, and from feet to feet.

PRODUCTION

Put to Producing Dry and Abandoned, 19.

OIL WELL: The production during the first 24 hours was barrels of liquid of which % was  
was oil; % was emulsion; % water; and % was sediment. A.P.I.  
Gravity.

GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of  
liquid Hydrocarbon. Shut in Pressure lbs.

Length of Time Shut in.

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.	T. Devonian.	T. Ojo Alamo.
T. Salt.	T. Silurian.	T. Kirtland-Fruitland.
B. Salt.	T. Montoya.	T. Farmington.
T. Yates.	T. Simpson.	T. Pictured Cliffs.
T. 7 Rivers.	T. McKee.	T. Menefee.
T. Queen.	T. Ellenburger.	T. Point Lookout.
T. Grayburg.	T. Gr. Wash.	T. Mancos.
T. San Andres. 4,920'	T. Granite.	T. Dakota.
T. Glorieta. 6,510'	T.	T. Morrison.
T. Drinkard. 7,695'	T.	T. Penn.
T. Tubbs.	T.	T.
T. Abo. 8,430'	T.	T.
T. Wolfcamp. 9,780'	T.	T.
T. Miss. Lime. 13,905'	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
			TOTAL DEPTH - 13,505'				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far  
as can be determined from available records.

Company or Operator. J. Don Hodgins, Inc.	Hobbs, New Mexico	April 5, 1954
Name. J. Don Hodgins	Address. Box 1898, Hobbs, New Mexico	(Date)
	Position or Title. President	