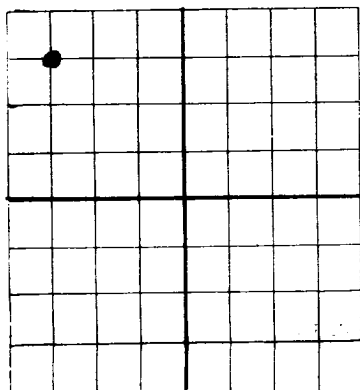


N

## NEW MEXICO OIL CONSERVATION COMMISSION

HOBBS OFFICE

Santa Fe, New Mexico

AREA 640 ACRES  
LOCATE WELL CORRECTLY

## WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE.

GEORGE P. LIVERMORE, INC.

Lubbock, Texas

Company or Operator

Address

J. C. Maxwell

Well No. 1

in NW NW

of Sec. 26

T. 15-S

Lease

R. 34-E, N. M. P. M., Wildcat Field, Lea County.

Well is 660 feet south of the North line and 660 feet East of the East line of Sec. 26

If State land the oil and gas lease is No. Assignment No.

If patented land the owner is J. C. Maxwell, Address Ft. Worth, Texas

If Government land the permittee is, Address

The Lessee is George P. Livermore, Inc., Address Lubbock, Texas

Drilling commenced July 31, 1942, Drilling was completed October 17, 1942

Name of drilling contractor George P. Livermore, Inc., Address Lubbock, Texas

Elevation above sea level at top of casing 4077 feet.

The information given is to be kept confidential until 19

## OIL SANDS OR ZONES

No. 1, from 5230' to 5290' No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

## IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 5332' to 5337' feet. 100' sulphur water in hole

No. 2, from 5337' to 5342' feet. 250' " " "

No. 3, from 5342' to 5350' feet. 480' " " "

No. 4, from to feet.

## CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
10-3/4	32.75	8	National	370'	Collar	-	0	0	0
7"	24.5	8 & 10	"	5182'	Halliburton	-	0	0	0

## MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
13-3/4	10-3/4	370'	150	Halliburton		
8-3/4	7" OD	5182'	1000	"		

## PLUGS AND ADAPTERS

Heaving plug—Material None Length Depth Set

Adapters—Material None Size

## RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
None						

Results of shooting or chemical treatment None

## RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

## TOOLS USED

Rotary tools were used from 0 feet to 5260 feet, and from 5350 feet to 6306 feet

Cable tools were used from 5260 feet to 5350 feet, and from feet to feet

## PRODUCTION

Put to producing Dry Hole, 19

The production of the first 24 hours was barrels of fluid of which % was oil; %

emulsion; % water; and % sediment. Gravity, Be

If gas well, cu. ft. per 24 hours Dry Hole Gallons gasoline per 1,000 cu. ft. of gas

Rock pressure, lbs. per sq. in.

## EMPLOYEES

E. E. Cherry, Driller Grady Whigham, Driller

H. M. Martin, Driller

## FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 19th

Lubbock, Texas, 10-19-42

day of October, 1942

Name E. E. Cherry

Position Engineer

Representing George P. Livermore, Inc.

Company or Operator

My Commission expires 6-1-43

Address Lubbock, Texas

# FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	96	96	Lime Rocks & Caliche
96	155	59	Sand & Shells
155	200	45	Shale Sand & Shells
200	320	120	Red Bed & Sand
320	510	190	Red Beds
510	1010	500	Red Bed & Sand
1010	1675	665	Red Bed & Shells
1675	1792	117	Red Bed, Red Rock & Anhydrite
1792	1849	57	Anhydrite
1849	1886	37	Anhydrite & Red Rock
1886	1892	6	Anhydrite
1892	2952	1060	Salt & Anhydrite
2952	3088	136	Anhydrite
3088	4360	1272	Anhydrite, Red Rock & Gyp
4360	4400	40	Anhydrite, Red Rock & Streaks of Lime
4400	4439	39	Anhydrite, Gyp & Streaks of Lime
4439	4555	116	Anhydrite & Gyp
4555	5600	1045	Lime
5600	5653	53	Lime & Chert
5653	6128	475	Lime
6128	6166	38	Lime, Anhydrite and Sand
6166	6193	27	Anhydrite & Lime
6193	6198	5	Lime & Anhydrite
6198	6253	55	Lime and Anhydrite
6253	6306	53	Lime T.D.