


NEW MEXICO OIL CONSERVATION COMMISSION  
Santa Fe, New Mexico

WELL RECORD  
Plugged & Abandoned

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

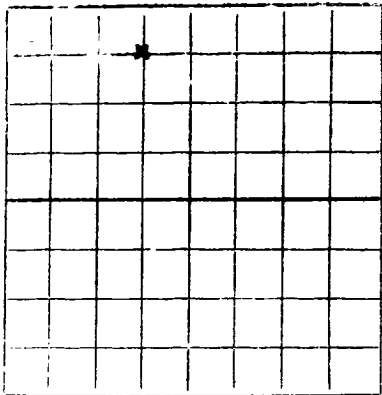

AREA 640 ACRES  
LOCATE WELL CORRECTLY

Carper Drilling Company, Inc.  
(Company or Operator)

Mary Reed  
(Lease)

Well No. 1, in NE  $\frac{1}{4}$  of NW  $\frac{1}{4}$  of Sec. 12, T. 15, R. 34E, NMPM.  
Wildcat Pool, Lee County.

Well is 330 feet from North line and 1900 feet from West line  
of Section 12. If State Land the Oil and Gas Lease No. is \_\_\_\_\_

Drilling Commenced March 25, 1963 Drilling was Completed April 27, 1963

Name of Drilling Contractor Sharp Drilling Company  
Address Midland, Texas

Elevation above sea level at Top of Tubing Head 4058 The information given is to be kept confidential until \_\_\_\_\_, 19\_\_\_\_.

OIL SANDS OR ZONES

No. 1, from \_\_\_\_\_ to \_\_\_\_\_ No. 4, from \_\_\_\_\_ to \_\_\_\_\_  
No. 2, from \_\_\_\_\_ to \_\_\_\_\_ No. 5, from \_\_\_\_\_ to \_\_\_\_\_  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ No. 6, from \_\_\_\_\_ to \_\_\_\_\_

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from 10,267 to 10,320 feet. 1650' In 2 hrs.  
No. 2, from 10,405 to 10,445 feet. 5005' In 1 hr.  
No. 3, from \_\_\_\_\_ to \_\_\_\_\_ feet.  
No. 4, from \_\_\_\_\_ to \_\_\_\_\_ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
11 3/4"	23.8	new	340	Golden			Surface
8 5/8"	24 & 32	"	4280	Reg.	3686		Intermediate

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
17 1/2"	11 3/4"	358'	425	pump & plug		
11"	8 5/8"	4299'	175	"		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

Result of Production Stimulation \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_ Depth Cleaned Out P & A

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 10,844 feet, and from feet to feet.  
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing P & A 19  
OIL WELL: The production during the first 24 hours was barrels of liquid of which % was  
was oil; % was emulsion; % water; and % was sediment. A.P.I.  
Gravity.  
GAS WELL: The production during the first 24 hours was M.C.F. plus barrels of  
liquid Hydrocarbon. Shut in Pressure lbs.  
Length of Time Shut in

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico			Northwestern New Mexico		
T. Anhy.	1845		T. Devonian		T. Ojo Alamo
T. Salt	1940		T. Silurian		T. Kirtland-Fruitland
B. Salt	2785		T. Montoya		T. Farmington
T. Yates	3035		T. Simpson		T. Pictured Cliffs
T. 7 Rivers			T. McKee		T. Menefee
T. Queen	3874		T. Ellenburger		T. Point Lookout
T. Grayburg	4316		T. Gr. Wash		T. Mancos
T. San Andres	4636		T. Granite		T. Dakota
T. Glorieta	6075		T.		T. Morrison
T. Drinkard	7373		T.		T. Penn
T. Tubbs			T.		T.
T. Abo	8052		T.		T.
T. Penn			T.		T.
T. Miss			T.		T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	1845	1845	Red beds	7395	7495	100	Sd.
1845	1940	95	Anhy.	7495	8055	560	Dol. & anhyd. w/ sd. & sh. stringers
1940	2785	845	Salt	8055	8175	120	Rd & gm str w/ interbedded dol.
2785	3035	250	Anhyd.	8135	9705	1570	Dol. w/ rd & gm sh stringers
3035	3200	165	Red shaley sd.	9705	10225	520	Ls. w/ sh, etc.
3200	3565	365	Anhyd.	10225	10305	80	Alt. ls & sh.
3565	3875	310	" w/ interbedded shale, sd.	10305	10847	542	Ls. w/ gry-blk sh stringers
3875	3935	60	Rd sd.	Enclosed are two copies of Schlumberger Sonic-Genesis Ray, Laterolog and Microlaterolog Logs.			
3935	4065	130	Anhyd. w/ alter. red sh., sd.				
4065	4095	30	Sd.				
4095	4315	220	Anhyd. & red beds				
4315	4370	55	" & dol.				
4370	4420	50	Red sd.				
4420	4455	35	Anhyd.				
4455	4475	20	Rd. sd.				
4475	4505	30	Anhyd.				
4505	4635	130	Sandstone w/ interbedded anhyd. & dol.				
4635	6075	1440	Dol. & Anhyd.				
6075	6350	275	Sd. & dol. interbedded				
6350	6410	60	Dol.				
6410	7395	985	Dol. & anhyd. w/ sd. stringers				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

May 3, 1963

Company or Operator: Carper Drilling Company, Inc. Address: Artesia, New Mexico  
Name: J. Marshner Scott Title: Exec. Vice-President