


CHOKE MANIFOLD

MORANCO #8

1500 SERIES

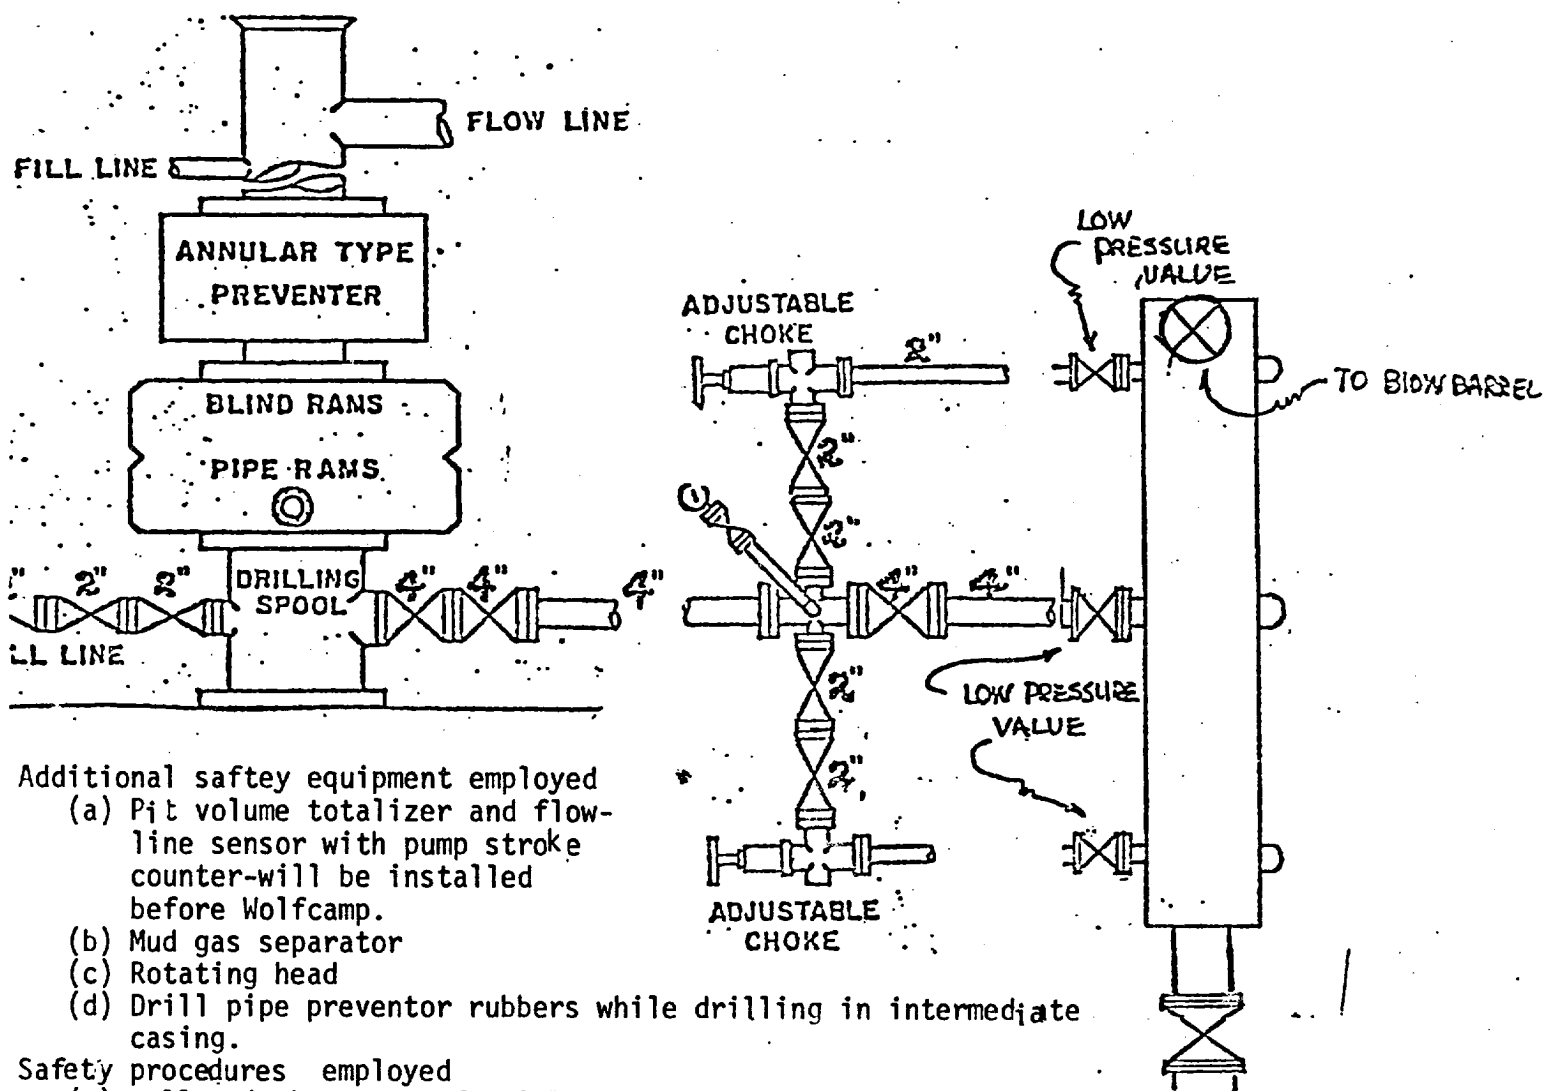

Additional safety equipment employed

- (a) Pit volume totalizer and flow-line sensor with pump stroke counter-will be installed before Wolfcamp.
- (b) Mud gas separator
- (c) Rotating head
- (d) Drill pipe preventor rubbers while drilling in intermediate casing.

Safety procedures employed

- (a) yellow jacket test of B.O.P.
- (b) D.S.T.'s only during daylight hours

TO PIT
OR FLARE
OR SEPARATOR
to south
of rig.

RECEIVED

JUN 24 1978

U.S. CONVENTION
1978