

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

## SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ gas ☐ other ☐  
well well well
2. NAME OF OPERATOR  
J. M. Huber Corporation
3. ADDRESS OF OPERATOR  
1900 Wilco Building, Midland, Tx.
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.) 1980' FEL & 2130' FSL  
AT SURFACE: 1980' FEL & 2130' FSL  
AT TOP PROD. INTERVAL: 1980' FEL & 2130' FSL  
AT TOTAL DEPTH: 1980' FEL & 2130' FSL
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO:

TEST WATER SHUT-OFF ☐  
FRACTURE TREAT ☐  
SHOOT OR ACIDIZE ☐  
REPAIR WELL ☒  
PULL OR ALTER CASING ☐  
MULTIPLE COMPLETE ☐  
CHANGE ZONES ☐  
ABANDON\* ☐  
(other) ☐

SUBSEQUENT REPORT OF:

RECEIVED

JUN 12 1979

U. S. GEOLOGICAL SURVEY  
DOWNS, NEW MEXICO

5. LEASE  
NM 015072
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME  
Stoltz Federal
9. WELL NO.  
1
10. FIELD OR WILDCAT NAME  
Morton Wolfcamp
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Sec. 12, R-15S, T-34E
12. COUNTY OR PARISH  
Lea
13. STATE  
New Mexico
14. API NO.
15. ELEVATIONS (SHOW DF, KDB, AND WD)  
4057' Gr.

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

As soon as possible:

- 1) Set 4½" RBP at 6000' and spot 40' sand on top of RBP.
- 2) Set Halliburton cement retainer at 5639'.
- 3) Cement squeeze hole at 5715' with 200 sks. Class "C" w/2% CaCl cmt.
- 4) SWI 48 hrs.
- 5) Drill out retainer and cement, retrieve RBP.
- 6) Put well on production.

Subsurface Safety Valve: Manu and Type Halliburton 4½" Bridge Plug... Set @ 6000' Ft.

I hereby certify that the foregoing is true and correct

GNED

Robert G. Setzler

TITLE Dist. Prod. Mgr. DATE June 11, 1979


(This space for Federal or State office use)

ROVED BY  
DITIONS OF APPROVAL, IF ANY

TITLE

DATE

\*See Instructions on Reverse Side

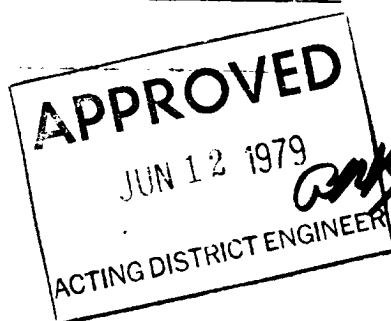

RECEIVED

JUN 19 1979

CLERK OF THE DISTRICT COURT  
HONOLULU, HAWAII