

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division  
1625 N. [unclear] Dr.  
Hobbs, NM 88240

FORM APPROVED  
OMB No. 1004-0135  
Expires July 31, 1996

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other Instructions on reverse side

1. Type of Well  
☐ Oil Well ☐ Gas Well ☒ Other Injection

2. Name of Operator  
Conoco, Inc.

3a. Address 3b. Phone No. (include area code)  
10 Desta Dr. Ste. 100W Midland, TX 915-686-5580

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Un. Ltr. G, 2565' FNL & 1345' FEL  
Section 28, T-17S, R-32E

5. Lease Serial No.

LC 057210

6. If Indian, Allottee or Tribe Name

7. If Unit or CA/Agreement, Name and/or No.

8. Well Name and No.

M.C.A. #280

9. API Well No.

30-025-23740

10. Field and Pool, or Exploratory Area

Maljamar GB-SA

11. County or Parish, State

Lea County, NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input checked="" type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 day following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

1. Set a C.I.B.P. at 3750'. Dump bail 35' of cement on top of C.I.B.P.
2. Circulate the hole with gelled brine mud.
3. Spot 25 sxs cement 2000'-2250'. TAG-
4. Perforate the 5 1/2" casing at 955'.
5. Set a cement retainer at 850' and squeeze 30 sxs cement thru perfs at 955'.
6. Spot 10 sxs cement surface plug.
7. Install dryhole marker and clear location.

14. I hereby certify that the foregoing is true and correct  
Name (Printed/Typed)

Reesa Wilkes

Title

Sr. Staff Regulatory Assistant

Signature

Reesa Wilkes

Date

4-11-00

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by

(ORIG. SGD.) ALEXIS C. SWOBODA

Title

PETROLEUM

Date

Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Office

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse) Distrib: BUM(6), OED(1), SHEAR, PANCA, COST ASST, FIRE ROOM  
GWW


RECEIVED  
APR 12 2000  
BLM  
ROSWELL NM

APR 12 2000  
BLM  
ROSWELL NM

CURRENT WELLBORE

3/29/00

Elev. = 3977' GR

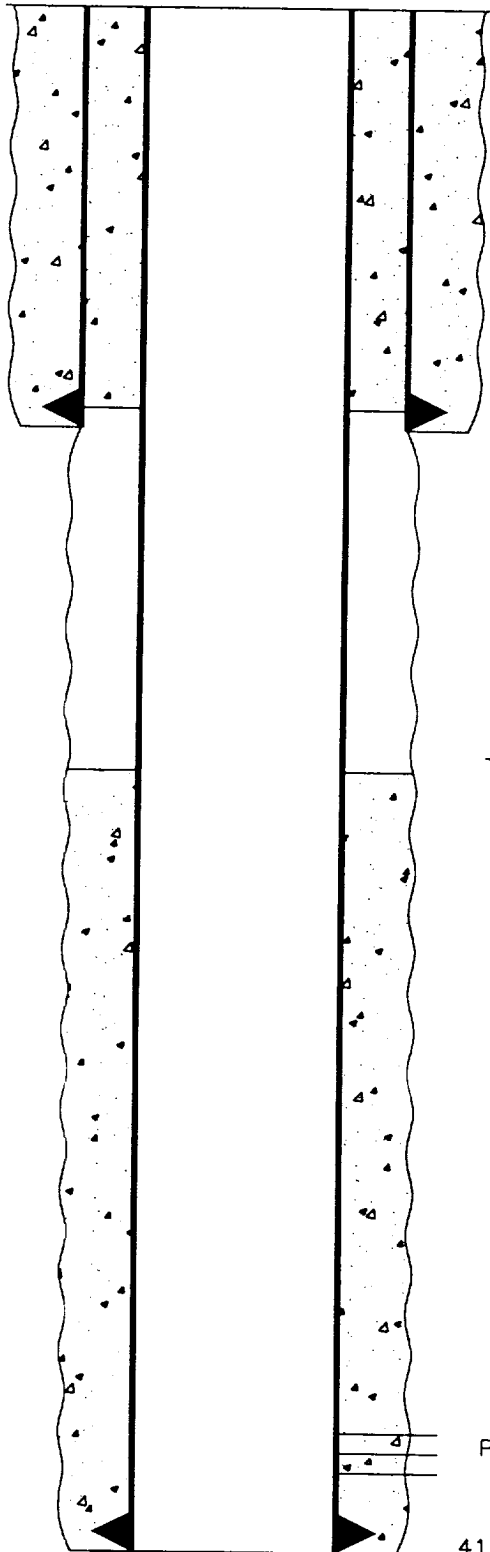

Squeeze cemented 5 1/2" x 8 5/8" annulus with 100 sxs cement

905' - 8 5/8" Casing. Cemented w/450 sxs. Circulated.

T.O.C. @ 2680' (Temp. Survey)

Perfs 3810'-4080'

4175' - 5 1/2", 14#, Casing. Cemented w/300 sxs

T.D. @ 4175'

CONOCO, INC.

M.C.A. Unit #280

2565' FNL & 1345' FEL

Sec. 28, T-17S, R-32E

Lea County, NM


RECEIVED  
APR 12 2000  
BLM  
ROSWELL NM

RECEIVED  
APR 12 2000  
BLM

# PROPOSED PLUG AND ABANDONMENT

3/29/00

Elev. = 3977' GR

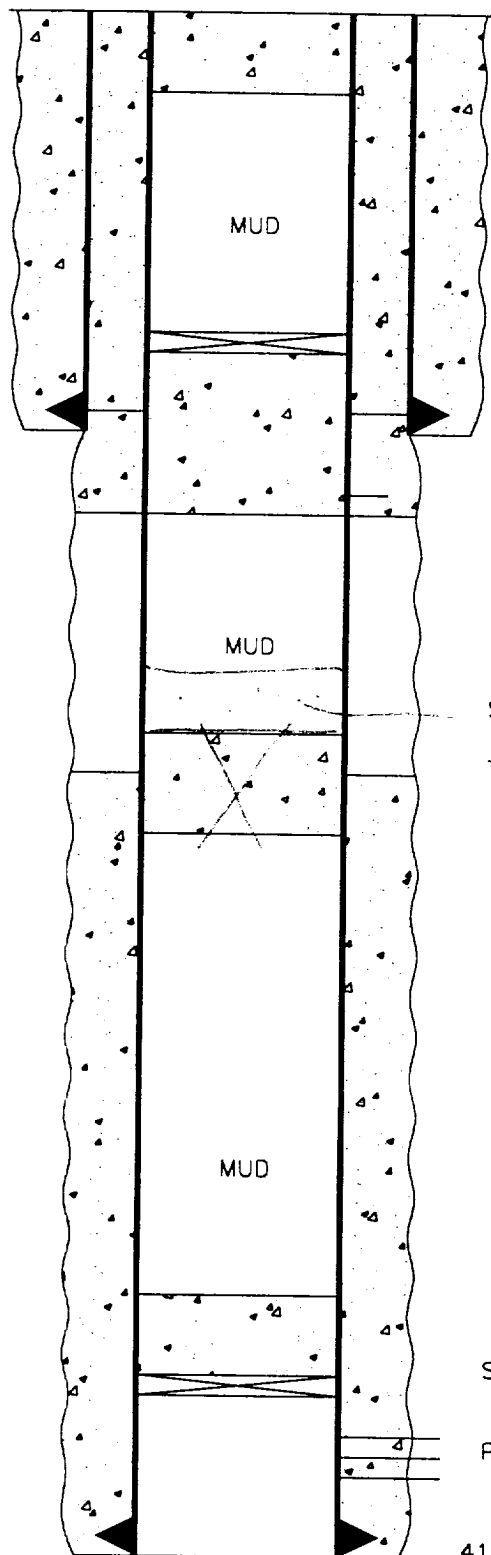

SPOT 10 SXS CEMENT SURFACE PLUG

Squeeze cemented 5 1/2" x 8 5/8" annulus with 100 sxs cement

SET A CEMENT RETAINER AT 850'  
SQUEEZE 30 SXS CEMENT THRU RETAINER

905' - 8 5/8" Casing. Cemented w/450 sxs. Circulated.

PERFORATE THE 5 1/2" CSG. AT 955'

SPOT 25 SXS CEMENT 2000'-2250'

*ALL PLUG SHOULD BE SET WITHIN 10' OF THE T.O.C. @ 2680' (Temp. Survey)*

SET A C.I.B.P. AT 3750' W/35' CEMENT ON TOP

Perfs 3810'-4080'

4175' - 5 1/2", 14#, Casing. Cemented w/300 sxs

T.D. @ 4175'

CONOCO, INC.

M.C.A. Unit #280

2565' FNL & 1345' FEL

Sec. 28, T-17S, R-32E

Lea County, NM

RECEIVED  
APR 14 1966  
BLM  
ROSNELL NM