

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE*
(Other instructions on reverse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

LC-029405(a)

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1.

OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR

Continental oil company

3. ADDRESS OF OPERATOR

Box 460 Hobbs, New Mexico

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface

1395' FNL and 1295' FEL of Sec 19

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3969' df

7. UNIT AGREEMENT NAME

MCA

8. FARM OR LEASE NAME

MCA Unit

9. WELL NO.

309

10. FIELD AND POOL, OR WILDCAT

MCA G-SA Regress

11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA

Sec 19, T-17S, R-32E

12. COUNTY OR PARISH

Lea N. Mexico

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

(Other) ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

ABANDON* ☐

CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐

FRACTURE TREATMENT ☐

SHOOTING OR ACIDIZING ☐

(Other) ☒ Setting prod string
(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

REPAIRING WELL ☐

ALTERING CASING ☐

ABANDONMENT* ☒

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Set 5 1/2" 14#, J-55 casing at 4075'. Cemented w/ 150 socks class C cement w/ 490 gal, 3# salt and 1/4# floccle per sock. Followed w/ 150 socks class C cement w/ 3# salt, 3# sand and 1/4# floccle per sock. top of cement @ 2800'. Plug back depth @ 4068'.

18. I hereby certify that the foregoing is true and correct

SIGNED

[Signature]

TITLE

Admin. Supervisor

DATE

5-19-72

(This space for Federal or State office use)


APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:

TITLE

*See Instructions on Reverse Side

USGS(5) MCA(3) File

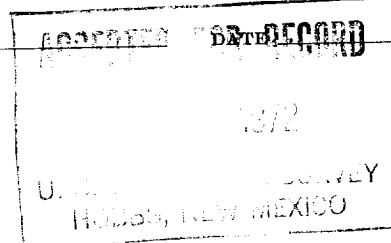

RECEIVED

MAY 8 1972

OIL CONSERVATION COMM.
WASHINGTON, D. C.