

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

COPY TO

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well gas ☐ well other ☐
2. NAME OF OPERATOR  
*Continental Oil Company*
3. ADDRESS OF OPERATOR  
*Box 460, Hobbs, N.M. 88240*
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: *660' FSL + 760' FWL*  
AT TOP PROD. INTERVAL: *same*  
AT TOTAL DEPTH: *same*
16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

- REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:
- |  |                          |                          |
|--|--------------------------|--------------------------|
| TEST WATER SHUT-OFF                    | <input type="checkbox"/> | <input type="checkbox"/> |
| FRACTURE TREAT                         | <input type="checkbox"/> | <input type="checkbox"/> |
| SHOOT OR ACIDIZE                       | <input type="checkbox"/> | <input type="checkbox"/> |
| REPAIR WELL                            | <input type="checkbox"/> | <input type="checkbox"/> |
| PULL OR ALTER CASING                   | <input type="checkbox"/> | <input type="checkbox"/> |
| MULTIPLE COMPLETE                      | <input type="checkbox"/> | <input type="checkbox"/> |
| CHANGE ZONES                           | <input type="checkbox"/> | <input type="checkbox"/> |
| ABANDON*                               | <input type="checkbox"/> | <input type="checkbox"/> |
| (other) <i>Set 8 5/8" Surface CSG.</i> | <input type="checkbox"/> | <input type="checkbox"/> |

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

*Spudded 11:00 PM 8-11-77 and DRLD 12 1/4" Hole to 1170'. Ran 8 5/8" H-40, 28# Surface CSG and Set AT 1170', CMTD w/ 600 sx class C" CMT. Plug Down 2:00 P.M. 8-12-77. WOC 18 Hrs. Tested to 500 PSI, Hold OK. DRLD Ahead with 7 7/8" Hole.*

*Cement Circulated*


Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED *John A. Butterfield* TITLE *Admin. Supv.* DATE *8-23-77*

(This space for Federal or State office use)

APPROVED BY \_\_\_\_\_ TITLE \_\_\_\_\_ DATE \_\_\_\_\_  
CONDITIONS OF APPROVAL, IF ANY:

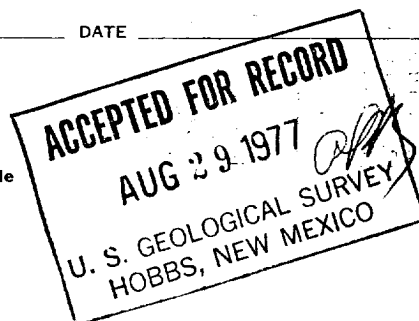

\*See Instructions on Reverse Side

*USGS (5), File*

RECEIVED

JUNE 1977

OIL CONSERVATION COMM.  
HOBBS, N. M.