
DOUBLE PREVENTER OPTION

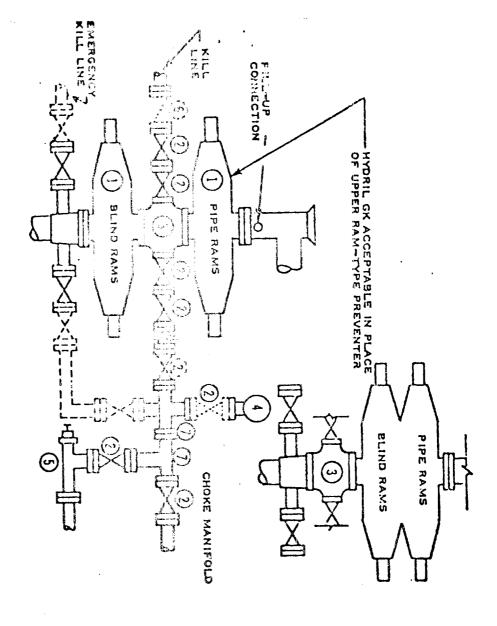

THE VALVES FLANGED TO THE BOP RUN MUST BE CAPABLE OF BEING OFENED AND CLOSED MANUALLY OR CLOSE ON POWER FAILURE AND BE CAPABLE OF BEING OPENED MANUALLY

VALVES MAY BE SITHER HAND OR POWER DEFENTED.

3000 PSI WP CLAMP HUBS MAY BE SUBSTITUTED FOR FLANCES

6

(3) NOTES: 2" SERIES 900 STEEL TEE

2" SERIES YOU CHECK VALVE

N2 2" MUD PRESSURE GAUGE SERIES 900 CHOKE

6 (@ ©

> SERIES 900 DRILLING SPOOL 211 SERIES 900 VALVE

Θ SERIES 900 RAM-TYPE BOP

(SERIES 900 FLANGES OR BETTER) BLOWOUT PREVENTER HOOK-UP

3000 PSI WORKING PRESSURE

PHILLIPS PETROLEUM COMPANY

..... OPTIONAL EQUIPMENT

RESULVED

OCT 1 41990

