

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 87210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised March 25, 1999


SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. <u>30-025-27927</u>
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☐ FEE ☒
2. Name of Operator <u>Rotary Wire Line Service, Inc</u>		6. State Oil & Gas Lease No.
3. Address of Operator <u>P.O. Box 2135, Hobbs, NM 88241-2135</u>		7. Lease Name or Unit Agreement Name: <u>Lee Carter</u>
4. Well Location Unit Letter <u>H</u> : <u>1980</u> feet from the <u>North</u> line and <u>660</u> feet from the <u>East</u> line Section <u>33</u> Township <u>16S</u> Range <u>37E</u> NMPM <u>4EA</u> County <u>NM</u>		8. Well No. <u>1</u>
10. Elevation (Show whether DR, RKB, RT, GR, etc.) <u>3278' DF</u>		9. Pool name or Wildcat <u>Knowles Drinkard, West</u>

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data	
NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒ TEMPORARILY ABANDON ☐ CHANGE PLANS ☐ PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐ OTHER: ☐	SUBSEQUENT REPORT OF: REMEDIAL WORK ☐ ALTERING CASING ☐ COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐ CASING TEST AND CEMENT JOB ☐ OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attachment
Set CIRP - 10,000# Wireline Set + CAP w/35' CLASS C Cement.
Cover Casing Shoes, SALT, Above PERFS + SURFACE. & ANKY.
Est. START DATE 30 days Following Approval.

THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.

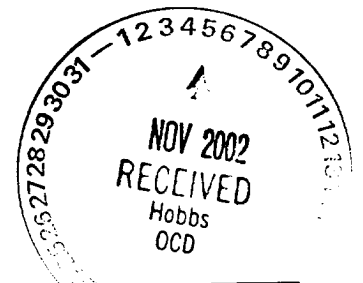

I hereby certify that the information above is true and complete to the best of my knowledge and belief.


SIGNATURE Mickey Walhoan TITLE Owner DATE 11/6/02
Type or print name Mickey Walhoan Telephone No. 397-6302
(This space for State use)

APPROVED BY _____ TITLE _____ DATE NOV - 7 2002
Conditions of approval, if any: _____

Loe CARTER #1

Procedure:

1. RU DDU
2. COOH w/ $2\frac{7}{8}$ " Prod. Tag & $5\frac{1}{2}$ " Anchor.
LD All Prod. Equip.
3. RU Wireline Mast Truck.
4. GIH w/ Gauge Ring. TAG PBTD @ 8579'
5. GIH w/ $5\frac{1}{2}$ " CIBP & Set @ 7722'.
Dump 35' CLASS C Cement
6. GIH w/ $5\frac{1}{2}$ " CIBP. Set @ 4820'.
Dump 35' CLASS C Cement
7. GIH w/ $5\frac{1}{2}$ " CIBP. Set @ 3039'.
Dump 35' CLASS C Cement
8. GIH w/ $5\frac{1}{2}$ " CIBP. Set @ 2134'.
Dump 35' CLASS C Cement
9. GIH w/ $5\frac{1}{2}$ " CIBP. Set @ 397'.
Dump 35' CLASS C Cement.
10. SPOT 60' CLASS C Cement TO SURFACE.
11. Cutoff Well head. Set PA MARKER.
12. RETURN SURFACE to original cleaned up condition.
13. RD Wireline Unit.



Lee CARTER #1

13 3/8" CSG.

377'

Anhyd
SALT

8 5/16" CSG.
4800'

7782'

ReAFS

7937'

PBTD 8579'

TD 11,515'

ANALYSIS

SURFACE

↑
60' - CLASS C CEMENT

CIBP 397' w/35'
CLASS C CEMENT TOC 362'

CIBP 2134' w/35'
CLASS C CEMENT TOC 2099'

CIBP 3039 w/35'
CLASS C CEMENT TOC 3034'

CIBP 4820' w/35'
CLASS C CEMENT TOC 4785'

CIBP 7722' w/35'
CLASS C CEMENT TOC 7747'

