


Things each crew member, driller and toolpusher should know:

1. Pressure rating of B.O.P., manifold and wellhead.
2. Where pipe rams and blind rams are in B.O.P. Unless changed by operator, they will be as diagramed below. See Hondo Drilling Company Specifications.
3. What valves are opened and closed on B.O.P. and manifold.
4. What to do in case of blowout or bit gain.
5. Bolts must be in all holes on B.O.P. and manifold flanges before drilling out unless specified otherwise by operator, but without exception below intermediate casing.
6. B.O.P. drills will be conducted on a regular basis.
7. B.O.P. pipe rams will be worked once each day.
8. Blind rams will be worked on each trip.

HONDO DRILLING COMPANY SPECIFICATIONS

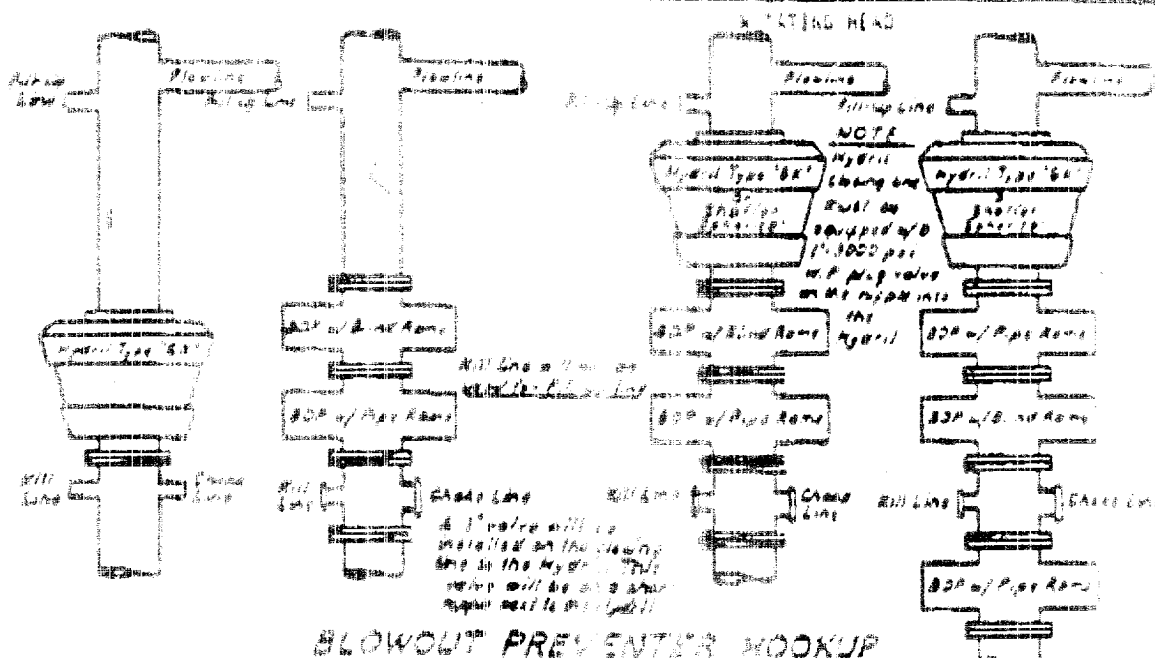

BLOWOUT PREVENTER HOOKUP

Approved Oil Company Partnered

8000 N. 10th St.
Suite 100
Lubbock, Texas 79401