

FIELD PRACTICES AND STANDARDS

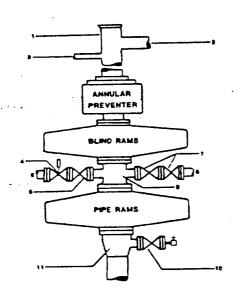

- BELL NIPPLE
- FLOW LINE
- FILL AP LINE
- T FE PRESSURE-OPERATED CHOKE LINE VALVE
- 6. 3" FE GATE VALVE
- & 3" FE CHOKE LINE TO CHOKE MANIFOLD
- 7. 2" FE GATE VALVES
- & 2" FE KILL LINE
- 9. DRILLING SPOOL
- 10. 2" SE OR FE GATE VALVE WITH NEEDLE VALVE
- 11. CASING HEAD HOUSING

Figure 7-7. Standard Hydraulic Blowout Preventer Assembly (3 M Working Pressure) Alternative 1

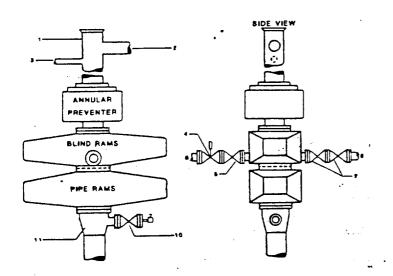

- 1. BELL NIPPLE
- 2. FLOW LINE
- 3. FILL-UP LINE
- 3" PRESSURE-OPERATED CHOKE LINE
- VALVE
- 3" GATE VALVE
 3" CHOKE LINE TO CHOKE MANIFOLD
- 2 GATE VALVES
- 2" FE KILL LINE
- 2" SE OR FE GATE VALVE WITH NEEDLE VALVE
- 11. CASING HEAD HOUSING

Figure 7-8. Standard Hydraulic Blowout Preventer Assembly (3 M Working Pressure) Alternative 2 (without Drilling Spool)

Page 250 Section II Well Control 4 January/83

JUN 6 1984
HOBBS OFFICE

ELF