


CONOCO INC.

Blow-out Preventer Specifications

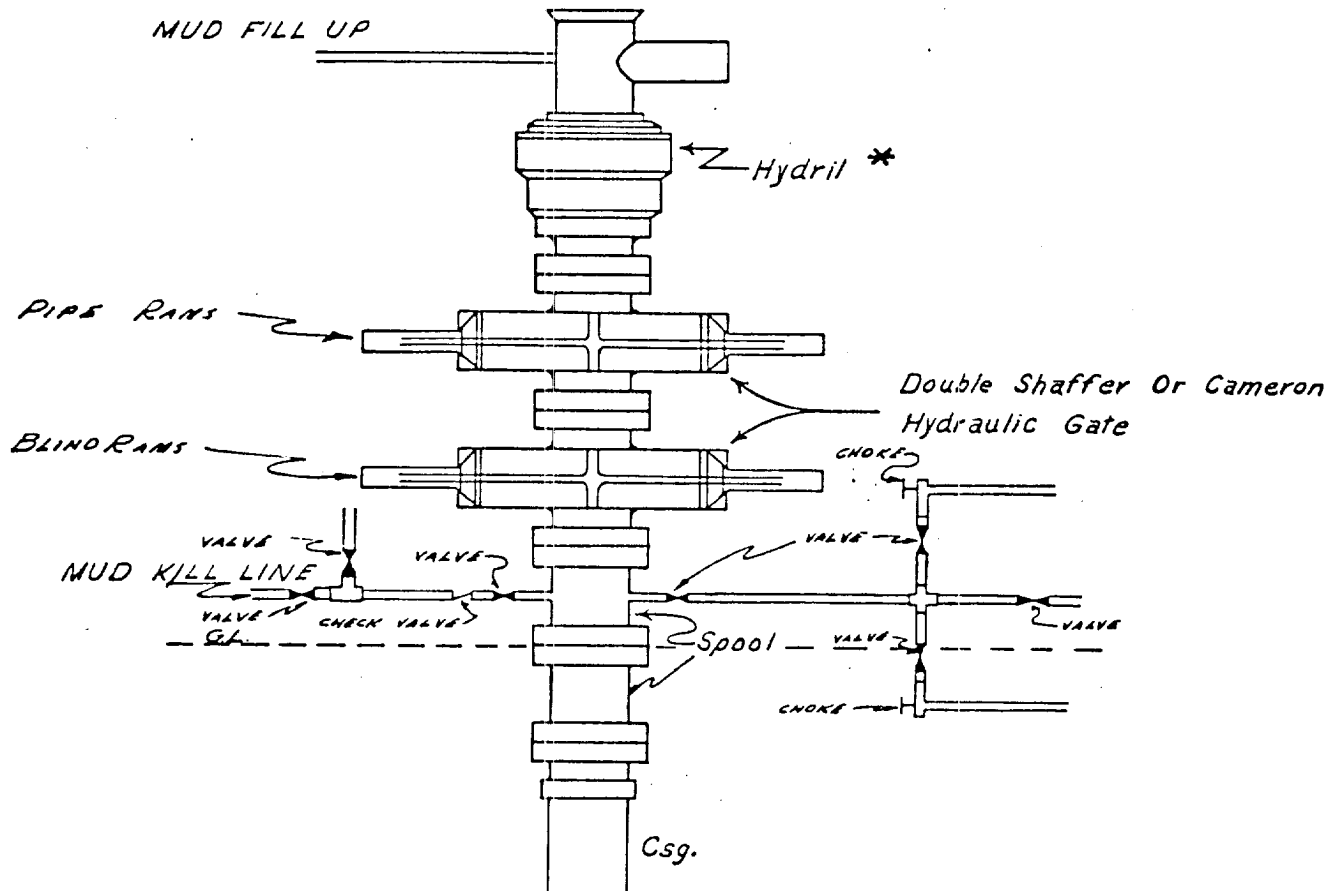

NOTE:

Manual and Hydraulic controls with closing unit no less than 75' from well head.
Remote controls on rig floor.

*

DUE TO SUBSTRUCTURE CLEARANCE, HYDRIL
MAY OR MAY NOT BE USED.

RECEIVED
JUL 1 1988
FBI
FEDERAL BUREAU OF INVESTIGATION
WASHINGTON, D.C.

ELF
JUL 8 8-5-88